



TECHNICAL INFORMATION
CVA615 Coffee System

CVA615 Coffee System - Table of Contents

1.0 CONSTRUCTION & DESIGN

1.1 Appliance Overview	1
1.1.1 Front View	1
1.1.2 Controls	1
1.1.3 Interior (Front of Appliance Open)	3
1.2 Technical Data	3
1.3 Layout of Components	5

2.0 INSTALLATION

Installation Procedures	7
-------------------------	---

3.0 COMMISSION and OPERATION

3.1 General Operation	9
3.1.1 Preparing Coffee	9
3.1.2 Canceling the Preparation	10
3.1.3 Steam Control	10
3.1.4 Hot Water	11
3.1.5 Adjusting the Coffee Grinder	12
3.1.6 Filling the Coffee Bean Container	13
3.1.7 Filling the Water Tank	14

4.0 DESCRIPTION of FUNCTION

4.1 Door Switch	15
4.2 Overflow (reed) Switch	15
4.3 Brew Unit – Cleaning and Care	16
4.4 Removing the Brew Unit from the Appliance	16
4.5 Connection of Brew Unit to Drive Mechanism	17
4.6 Brewing Procedure	17
4.7 Ground Container	20
4.8 Waste Unit Present Switch	20
4.9 Water Tank	22
4.10 Water Level Switch	23
4.11 Grinder Assembly	25
4.12 Grinder Overload Protection	26
4.13 Ground Coffee Dispensing	28
4.14 Dispenser Switch	29
4.15 Brew Unit Drives	30
4.16 Water Pump	32

4.0 DESCRIPTION of FUNCTION (Continued)

<u>4.17 Flow Meter</u>	<u>32</u>
<u>4.18 Heaters</u>	<u>32</u>
<u>4.19 Flow Through Heaters</u>	<u>33</u>
<u>4.20 Water Path</u>	<u>35</u>
<u>4.20.1 Water Intake</u>	<u>36</u>
<u>4.20.2 Water Path – Coffee</u>	<u>36</u>
<u>4.20.3 Water Path – Hot Water</u>	<u>36</u>
<u>4.20.4 Water Path – Steam</u>	<u>36</u>
<u>4.21 Water Valve</u>	<u>37</u>
<u>4.22 Electronic Assemblies</u>	<u>38</u>
<u>4.22.1 Power Electronic</u>	<u>38</u>
<u>4.22.2 CPU Electronic</u>	<u>39</u>

5.0 SERVICE and MAINTENANCE

<u>5.1 Lid – Removal</u>	<u>41</u>
<u>5.2 Interference Suppression Filter – Removal</u>	<u>42</u>
<u>5.3 Rear Panel – Removal</u>	<u>42</u>
<u>5.4 Adjustment Slide Switch Frame – Removal</u>	<u>43</u>
<u>5.5 Door Contact Switch – Removal</u>	<u>44</u>
<u>5.6 Base Plate – Removal</u>	<u>45</u>
<u>5.7 Drip Tray - Removal</u>	<u>46</u>
<u>5.8 Overflow Switch Actuator Float - Removal</u>	<u>47</u>
<u>5.9 Overflow Switch - Removal</u>	<u>48</u>
<u>5.10 Rear Door Panel - Removal</u>	<u>49</u>
<u>5.11 Fascia Panel Cover - Removal</u>	<u>50</u>
<u>5.12 Selector Switch - Removal</u>	<u>51</u>
<u>5.13 Display Module Electronic – Removal</u>	<u>52</u>
<u>5.14 Coffee Dispensing Nozzle - Removal</u>	<u>53</u>
<u>5.15 Coffee Dispensing Nozzle – Installation</u>	<u>54</u>
<u>5.16 Steam Valve and Steam Valve Switch – Removal</u>	<u>55</u>
<u>5.17 Hot Water Nozzle – Removal</u>	<u>56</u>
<u>5.18 Hot Water Valve - Removal</u>	<u>56</u>
<u>5.19 Checking Temperature at Coffee Dispenser</u>	<u>57</u>
<u>5.20 Brew Unit – Removal (in start / home position)</u>	<u>58</u>
<u>5.21 Brew Unit – Removal (NOT in start / home position)</u>	<u>59</u>
<u>5.22 Brew Unit – Installation</u>	<u>61</u>
<u>5.23 Brew Unit – Cleaning Procedure</u>	<u>61</u>
<u>5.24 Brew Unit – Filter Cleaning</u>	<u>62</u>
<u>5.25 Brew Unit – Degreasing via the Rinse Cycle</u>	<u>63</u>

5.0 SERVICE and MAINTENANCE (Continued)

<u>5.26 Brew Unit – Lubrication</u>	<u>65</u>
<u>5.27 Brew Unit – Manual Reset to Home (out of appliance)</u>	<u>66</u>
<u>5.28 Brew Unit Creamer Valve – Removal</u>	<u>67</u>
<u>5.29 Brew Unit Handle – Removal</u>	<u>67</u>
<u>5.30 Brew Unit Funnel – Removal</u>	<u>68</u>
<u>5.31 Brew Unit Ram – Service</u>	<u>69</u>
<u>5.32 Brew Unit Drives – Service</u>	<u>71</u>
<u>5.33 Water Tank Float – Removal</u>	<u>76</u>
<u>5.34 Water Tank Lip Seal – Removal</u>	<u>77</u>
<u>5.35 Lower Section of Tank Valve – Removal</u>	<u>78</u>
<u>5.36 Beans Container – Removal</u>	<u>80</u>
<u>5.37 Beans Container Guide – Removal</u>	<u>81</u>
<u>5.38 Grinder – Disassembly</u>	<u>82</u>
<u>5.39 Grinder Assembly – Basic Setting</u>	<u>85</u>
<u>5.40 Grinder Unit – Removal</u>	<u>86</u>
<u>5.41 Dispensing Solenoid – Removal</u>	<u>88</u>
<u>5.42 Dispenser Switch – Removal</u>	<u>88</u>
<u>5.43 Waterpath & Flowmeter – Testing</u>	<u>89</u>
<u>5.44 Water Path Leakage Test</u>	<u>91</u>
<u>5.45 Water Path Connections – Opening</u>	<u>92</u>
<u>5.46 Water Path Connections – Closing</u>	<u>92</u>

6.0 FAULT DIAGNOSIS

<u>6.1 Programming Mode</u>	<u>93</u>
<u>6.2 Service Mode</u>	<u>94</u>
<u>6.3 Displayed Messages</u>	<u>96</u>
<u>6.4 Fault Diagnosis</u>	<u>98</u>
<u>6.5 Wiring Diagram</u>	<u>101</u>

CVA615 Coffee System – List of Figures

<u>1-1 Front Overview</u>	<u>1</u>
<u>1-2 Controls Overview</u>	<u>1</u>
<u>1-3 Interior View / Door Open</u>	<u>2</u>
<u>1-4 Product Dimensions</u>	<u>3</u>
<u>1- 5 Layout of Components</u>	<u>5</u>
<u>2-1 Operating Instruction Manual (Cover)</u>	<u>7</u>
<u>3-1 Cup placed under dispenser ports</u>	<u>9</u>
<u>3-2 Pressing the Coffee Button</u>	<u>9</u>
<u>3-3 Displayed Message</u>	<u>9</u>
<u>3-4 Canceling the preparation</u>	<u>10</u>
<u>3-5 Steam Selector</u>	<u>10</u>
<u>3-6 Cup under Hot Water Dispenser</u>	<u>11</u>
<u>3-7 Hot Water Button</u>	<u>11</u>
<u>3-8 Grinder Controls</u>	<u>12</u>
<u>3-9 Adding coffee beans</u>	<u>13</u>
<u>4-1 Door Switch</u>	<u>15</u>
<u>4-2 Brew Unit in home position</u>	<u>16</u>
<u>4-3 Brew Unit connections</u>	<u>17</u>
<u>4-4 Brew Unit Filters</u>	<u>18</u>
<u>4-5 Brew Unit Components</u>	<u>18</u>
<u>4-6 Brew Unit with compressed coffee</u>	<u>19</u>
<u>4-7 Waste Unit Present Switch</u>	<u>20</u>
<u>4-8 Waste Unit and magnet</u>	<u>21</u>
<u>4-9 Water Tank and valve</u>	<u>22</u>
<u>4-10 Water Level Switch</u>	<u>23</u>
<u>4-11 Water Level Switch – Float</u>	<u>23</u>
<u>4-12 Grinder Assembly</u>	<u>25</u>
<u>4-13 Components of Grinder Overload Protection</u>	<u>26</u>
<u>4-14 Grinder ball positions</u>	<u>27</u>
<u>4-15 Dispensing components</u>	<u>28</u>
<u>4-16 Dispensing Lever</u>	<u>29</u>
<u>4-17 Brew Unit Connections</u>	<u>30</u>
<u>4-18 Brew Unit Drives</u>	<u>31</u>

CVA615 Coffee System – List of Figures (Continued)

<u>4-19 Hot Water / Coffee Heater</u>	<u>34</u>
<u>4-20 Steam Heater</u>	<u>34</u>
<u>4-21 Water Path</u>	<u>35</u>
<u>4-22 Water Valve</u>	<u>37</u>
<u>4-23 Power Electronic</u>	<u>38</u>
<u>4-24 CPU Electronic</u>	<u>39</u>
<u>5-1 Lid and screws</u>	<u>41</u>
<u>5-2 Interference Suppression Filter</u>	<u>42</u>
<u>5-3 Rear Panel</u>	<u>42</u>
<u>5-4 Removing the Slide Switch Frame</u>	<u>43</u>
<u>5-5 Door Switch</u>	<u>44</u>
<u>5-6 Base Plate Removal</u>	<u>45</u>
<u>5-7 Drip Tray Removal</u>	<u>46</u>
<u>5-8 Overflow Switch Float</u>	<u>47</u>
<u>5-9 Overflow Switch</u>	<u>48</u>
<u>5-10 Rear Door Panel Removal</u>	<u>49</u>
<u>5-11 Fascia Panel Cover Assembly</u>	<u>50</u>
<u>5-12 Selector Switch</u>	<u>51</u>
<u>5-13 Rear of Front Door without cover</u>	<u>52</u>
<u>5-14 Coffee Dispensing Nozzle Components</u>	<u>53</u>
<u>5-15 Steam Valve and Switch and Components</u>	<u>55</u>
<u>5-16 Hot Water Valve Components</u>	<u>56</u>
<u>5-17 Brew Unit Connection Socket</u>	<u>60</u>
<u>5-18 Brew Unit Connection Socket Photo</u>	<u>60</u>
<u>5-19 Brew Unit – Removal for Cleaning</u>	<u>61</u>
<u>5-20 Brew Unit – Installation</u>	<u>62</u>
<u>5-21 Cleaning tablet being placed into Brew Unit</u>	<u>63</u>
<u>5-22 Brew Unit Lubrication Points (left side)</u>	<u>65</u>
<u>5-23 Brew Unit Lubrication Points (right side)</u>	<u>65</u>
<u>5-24 Moving Brew Unit to Home</u>	<u>66</u>
<u>5-25 Brew Unit reset position</u>	<u>66</u>
<u>5-26 Brew Unit Handle Removal</u>	<u>67</u>
<u>5-27 Rear view of Brew Unit</u>	<u>68</u>
<u>5-28 Front view of Brew Unit</u>	<u>68</u>
<u>5-29 Releasing the ram from the Brew Unit</u>	<u>69</u>

CVA615 Coffee System – List of Figures (Continued)

<u>5.30 Brew Unit chamber</u>	<u>70</u>
<u>5.31 Ram Assembly and lubrication points</u>	<u>70</u>
<u>5.32 Front Plate Assembly with Drive Assembly Screw Positions</u>	<u>72</u>
<u>5.33 Grinder Retaining Screws</u>	<u>73</u>
<u>5.34 Grinder Retaining Nuts</u>	<u>73</u>
<u>5-35 Upper Front Plate Assembly</u>	<u>74</u>
<u>5-36 Using a suitable tool to keep Front Plate lifted</u>	<u>75</u>
<u>5-37 Water Tank and Float</u>	<u>76</u>
<u>5-38 Removal of the lip seal</u>	<u>77</u>
<u>5-39 Removing the lip seal (2)</u>	<u>77</u>
<u>5-40 Water Tank Lip Seal</u>	<u>78</u>
<u>5-41 Underside view of CVA615</u>	<u>79</u>
<u>5-42 Removing the Beans Container</u>	<u>80</u>
<u>5-43 Beans Container Guide</u>	<u>81</u>
<u>5-44 Grinder Adjustment Level</u>	<u>82</u>
<u>5-45 Grinder Adjustment Components</u>	<u>83</u>
<u>5-46 Grinder</u>	<u>84</u>
<u>5-47 Grinder Removal</u>	<u>86</u>
<u>5-48 Grinder Coupling</u>	<u>87</u>
<u>5-49 Test Jumper Position</u>	<u>90</u>
<u>5-50 Service Mode Display</u>	<u>90</u>
<u>5-51 Water Path Connection</u>	<u>92</u>

CVA615 Coffee System - List of Tables

<u>6-1 Programming Mode</u>	<u>93</u>
<u>6-2 Service Mode Navigation</u>	<u>95</u>
<u>6-3 Displayed Messages (1 of 2)</u>	<u>96</u>
<u>6-4 Displayed Messages (2 of 2)</u>	<u>97</u>

1.0 Construction and Design

1.1 Appliance Overview

1.1.1 Front View

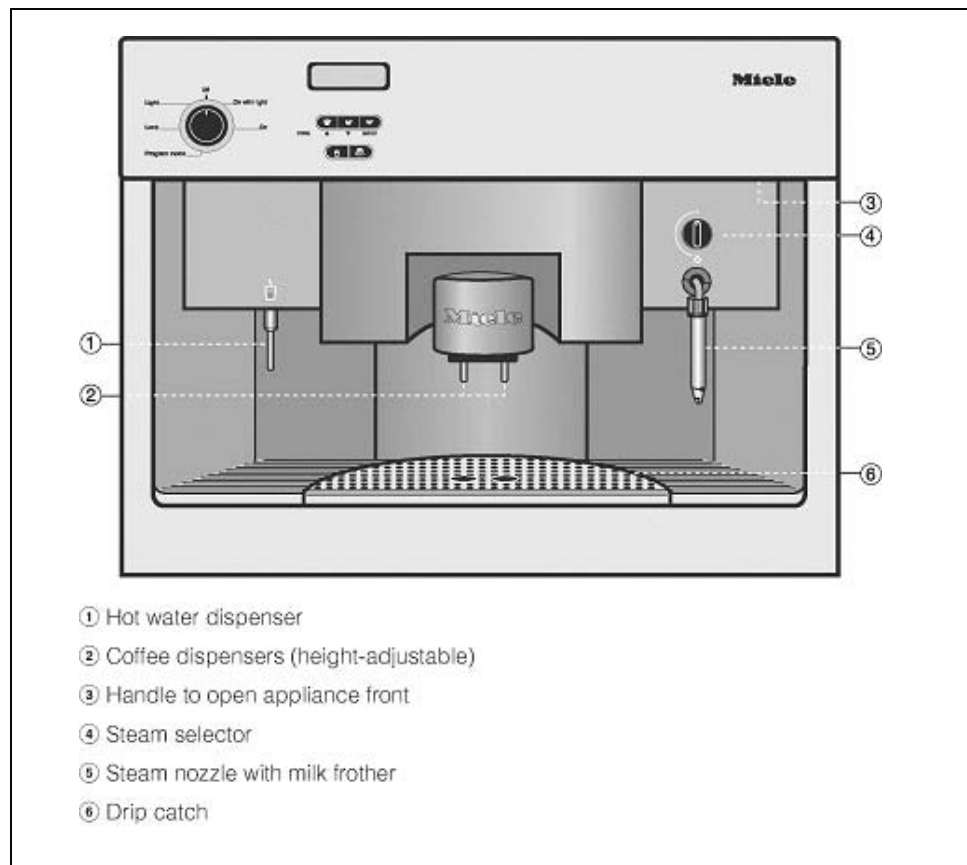


Figure 1-1: Front Overview CVA615

1.1.2 Controls

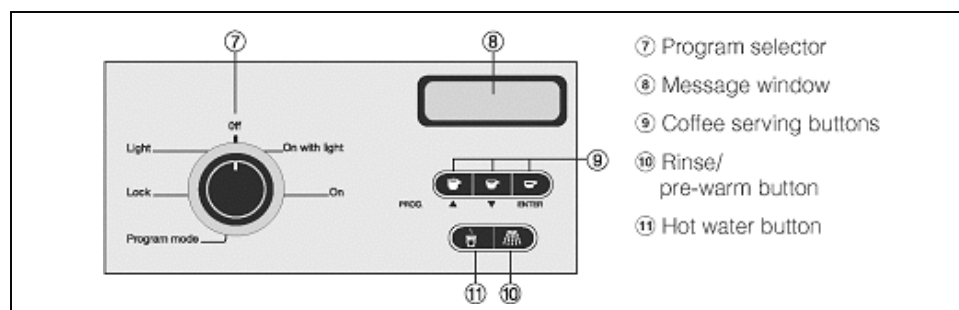
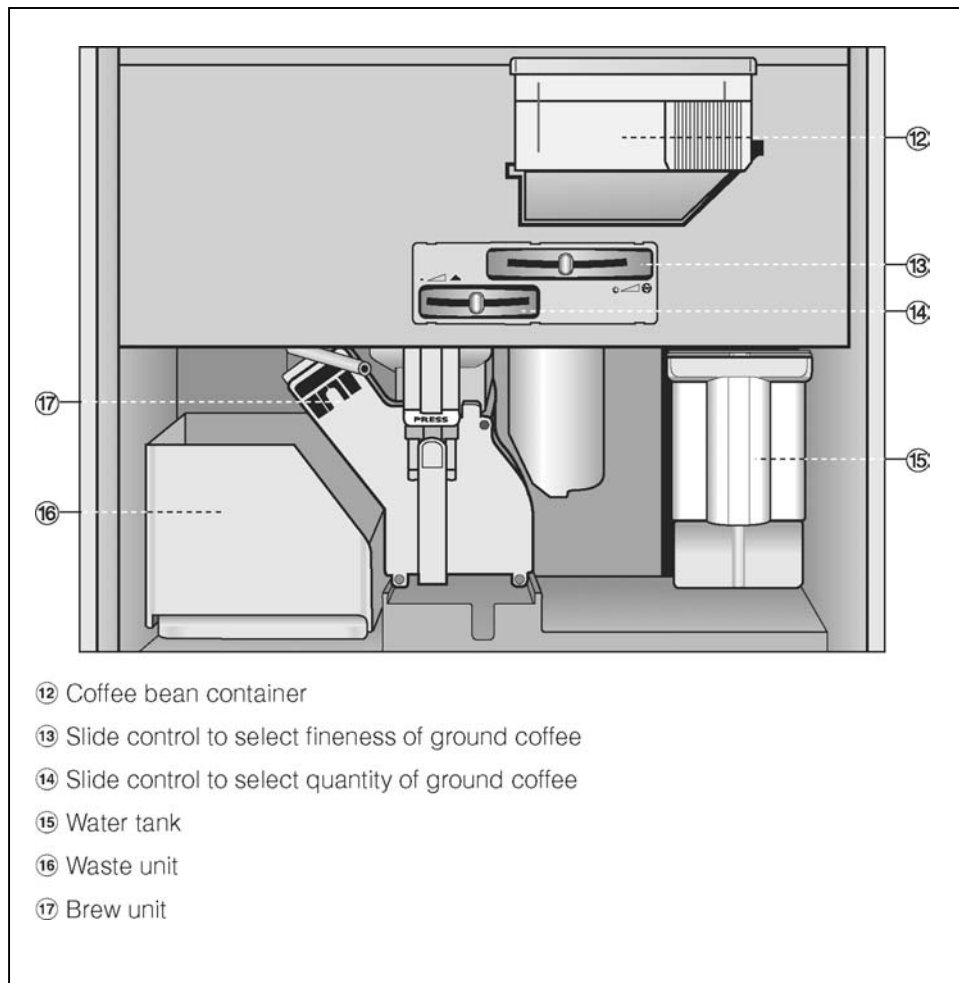


Figure 1-2: CVA615 Controls

Technical Information**1.1.3 Interior (Front of Appliance Opened)****Figure 1-3:** Interior view of CVA615 with door opened

1.2 Technical Data

Product Dimensions

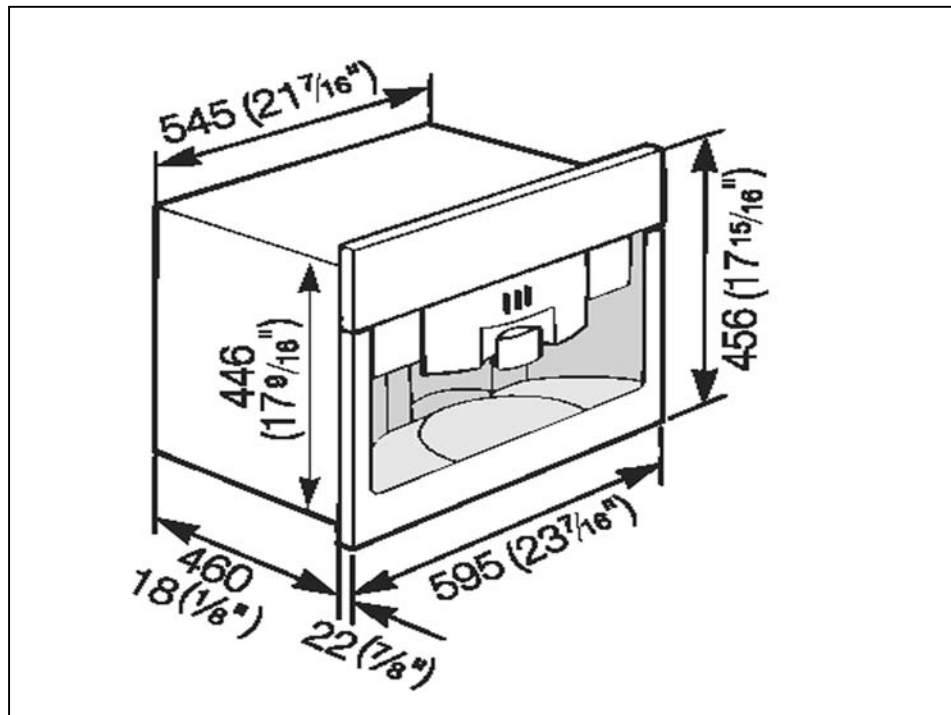


Figure 1-4: CVA615 product dimensions

Electrical Information

The appliance comes equipped with a 6 ft (1.8 m) power cord with a NEMA 5-15P molded plug for connection to a 120 V, 15 A, 60 Hz power supply.

Technical Information

1.3 Layout of Components

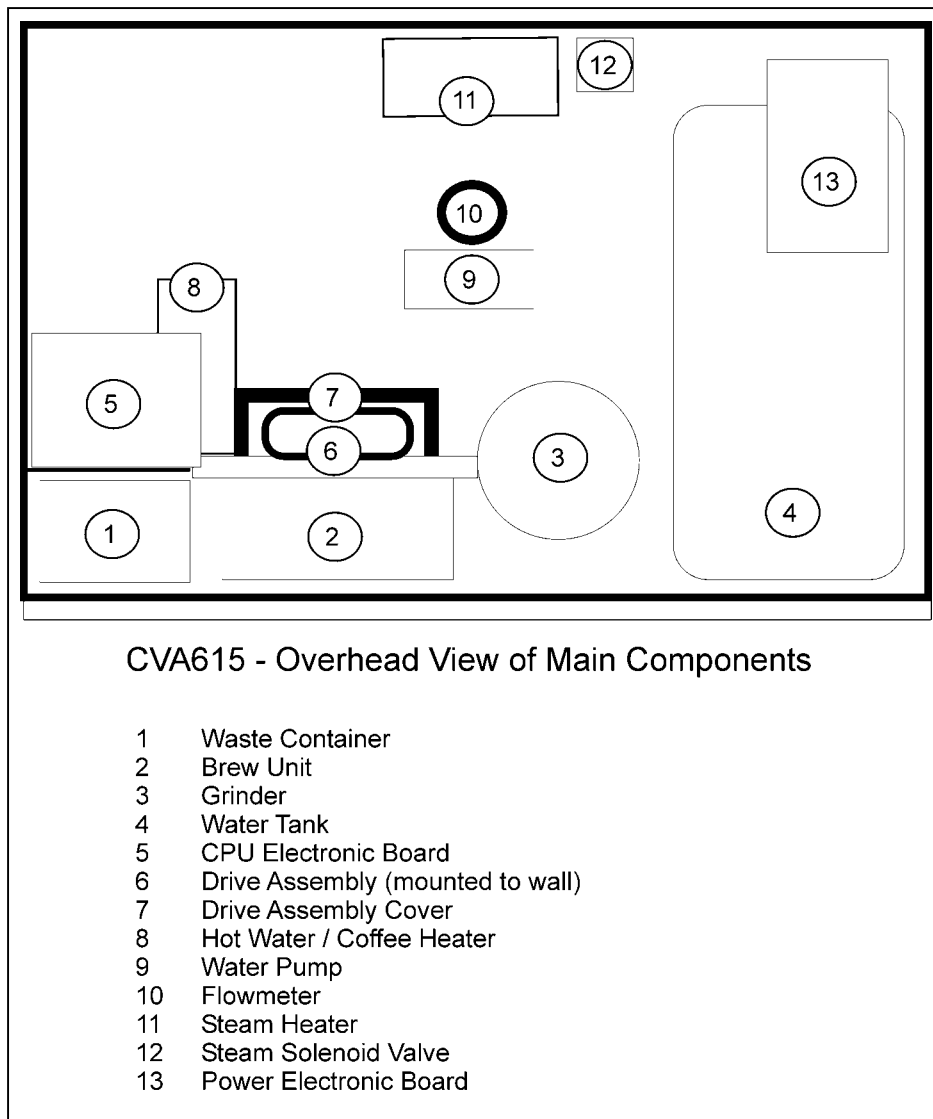


Figure 1-5: CVA615 Overhead view of components

Technical Information

2.0 Installation

Refer to the Installation section of the Operating Manual.

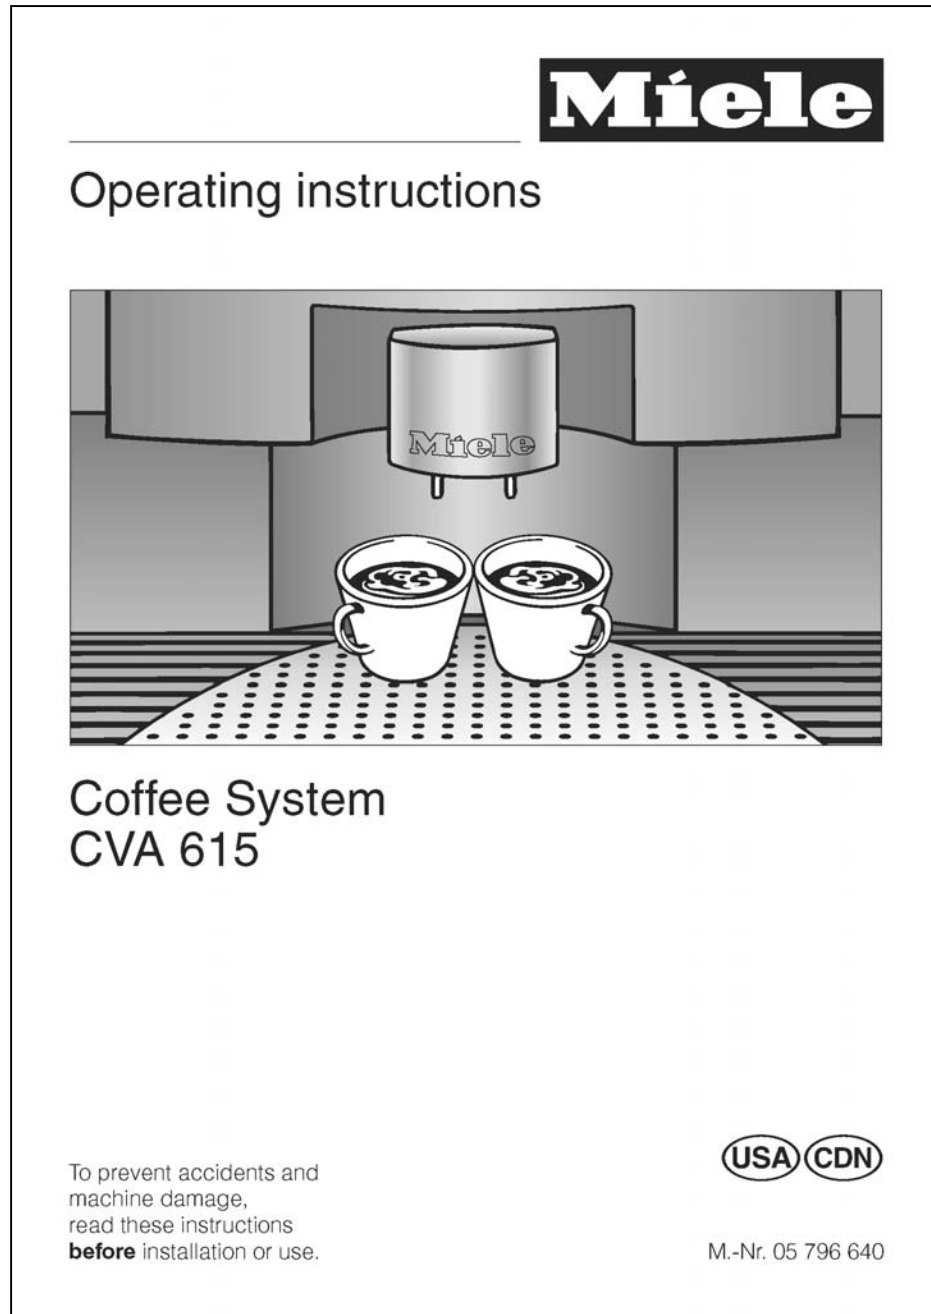


Figure 2-1: Operating Manual

Technical Information

3.0 Commission and Operation

3.1 General Operation

3.1.1 Preparing Coffee

1. Place a cup under **both** coffee dispensing ports.

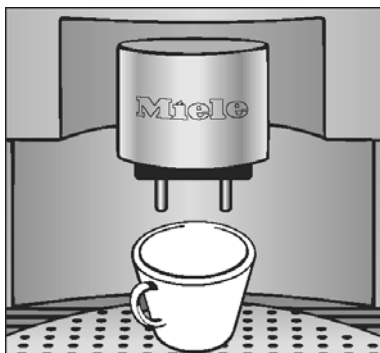


Figure 3-1: Cup under the dispensing ports.

2. Press the desired size coffee button once. This will start the preparation cycle.



Figure 3-2: Pressing the Coffee Button

The following message will appear in the message window, depending on the button pressed:



Figure 3-3: Displayed message

Technical Information

3.1.2 Canceling the Preparation

Press any one of the coffee buttons to stop preparation immediately.



Figure 3-4: Canceling the preparation process

3.1.3 Steam Control**Caution**

The steam from the appliance is extremely hot; use caution to prevent burns.

- Turn the steam ON by turning the Steam Selector counter-clockwise.
- Turn the steam OFF by turning the Steam Selector clockwise.

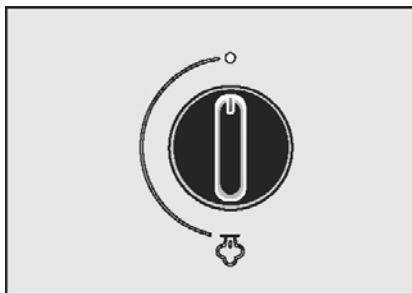


Figure 3-5: Steam Selector

3.1.4 Hot Water

1. Place a cup under the hot water dispenser.




Figure 3-6: Placement of cup under the hot water dispenser

2. Press the hot water button. Hot water will be dispensed.
3. Press the hot water button again to stop the flow of hot water.



Figure 3-7: Hot Water Button

Note

If programmed with the hot water feature activated...
The flow of hot water will stop automatically once a predetermined amount of hot water has passed through the system

Technical Information

3.1.5 Adjusting the Coffee Grinder

Controls

- Slide to the left for finer grinding
- Slide to the right for coarser grinding.

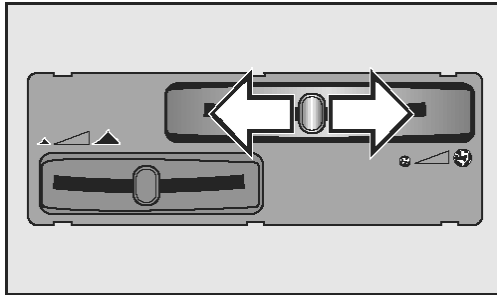


Figure 3-8: Grinder Controls

- If the espresso flows too quickly into the cup, the beans may have been ground too coarsely. The grinder should be adjusted to a finer setting.
- If the espresso only trickles into the cup, the beans may have been ground too fine and the coffee will be bitter. The grinder should be adjusted to a coarser setting.
- If the crema is evenly colored but pale, the ground coffee is too coarse.
- If the crema is very dark brown on one side, graduating almost to white on the other, the ground coffee is too fine.

Note

- You should be able to feel notches when moving the slide control.
- If the slide control will not move:
Close the machine and dispense a cup of coffee. Then try to move the slide control again.

3.1.6 Filling the Coffee Beans Container

1. Open the appliance door.
2. Carefully slide the container out so that the lid is visible.
3. Lift the lid.
4. Fill the container with coffee beans to about 1" from the top.
5. Close the lid and push the container back into place.
6. Shut the appliance door.

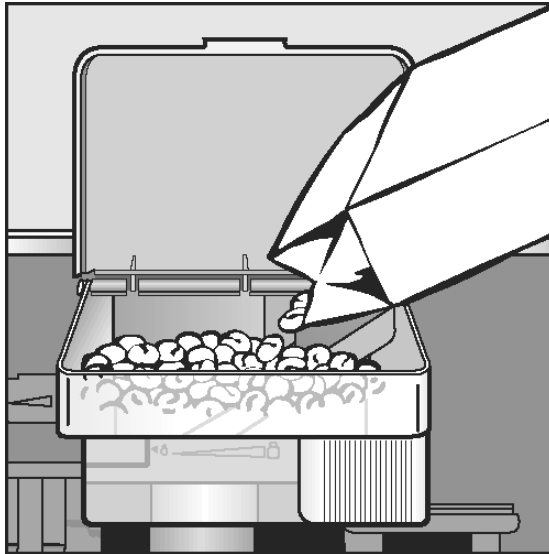


Figure 3-9: Adding coffee beans

Important

Only put whole espresso or coffee beans in the container. Anything else, including ground coffee, hot cocoa, instant coffee, or treated coffee beans (flavorings, caramel, or sugar) will damage the grinder.

Note

Do not remove the coffee bean container from the appliance unless it is completely empty, otherwise coffee beans will spill out.

Technical Information

3.1.7 Filling the Water Tank

The water tank must be washed and filled with fresh drinking water each day. A reminder will appear in the message window when the unit is first turned on.

1. Open the front of the machine.
2. Lift the water tank up and out of the appliance.
3. Open the lid and fill the container with cold drinking water to within about 1" (2 cm) of the top.

Important

Never add hot water or any other liquid except cold water to the water tank.

4. Close the lid and place the tank in the machine, pushing it straight back.
5. Close the front of the appliance.

4.0 Description of Function

4.1 Door Switch

The door switch, removes power to the appliance when the door is opened. See figure 4-1.

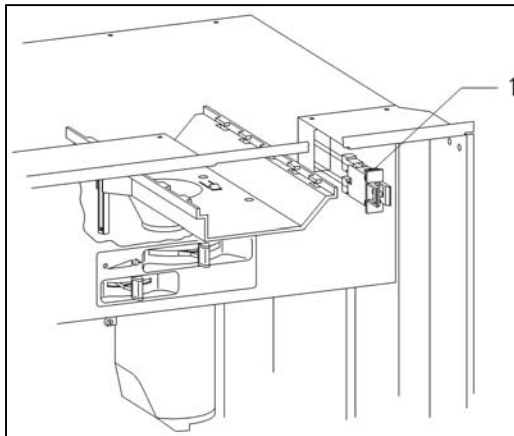


Figure 4-1: Door Contact Switch (S24)

4.2 Overflow (reed) Switch

The overflow switch is in the lower section of the appliance case. The float with magnet is located in the drip tray. Should a leak develop, water flows into the drip tray. The float with magnet then rises and activates the overflow reed switch which in turn causes the electronic control to switch the unit off.

Note

When the Service Mode is accessed, the top line of the display shows the switches that are activated. An “**A**” will be displayed if the Overflow Switch is actuated. (i.e. water present in the bottom of the appliance) Refer to Section 6 for more information on the Service Mode.

Technical Information

4.3 Brew Unit - Cleaning and Care

The Brew Unit is a mechanically operated component that is subjected to high forces. After a long period of use, the Brew Unit may become clogged. To ensure correct operation of the Brew Unit, it is essential to clean it regularly and apply silicone grease to the moving parts. Refer to section “4 – Maintenance” for further information and procedures.

4.4 Brew Unit Removal from the Appliance

The brew unit must be in the home position (see figure 4-2) before it can be removed from the appliance.

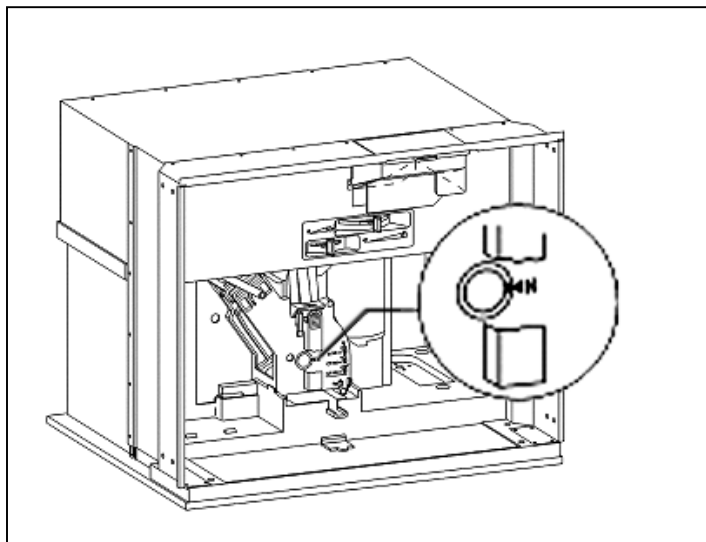


Fig. 4-2: Brew unit in “home” position.

4.5 Connection of Brew Unit to Drive Mechanism

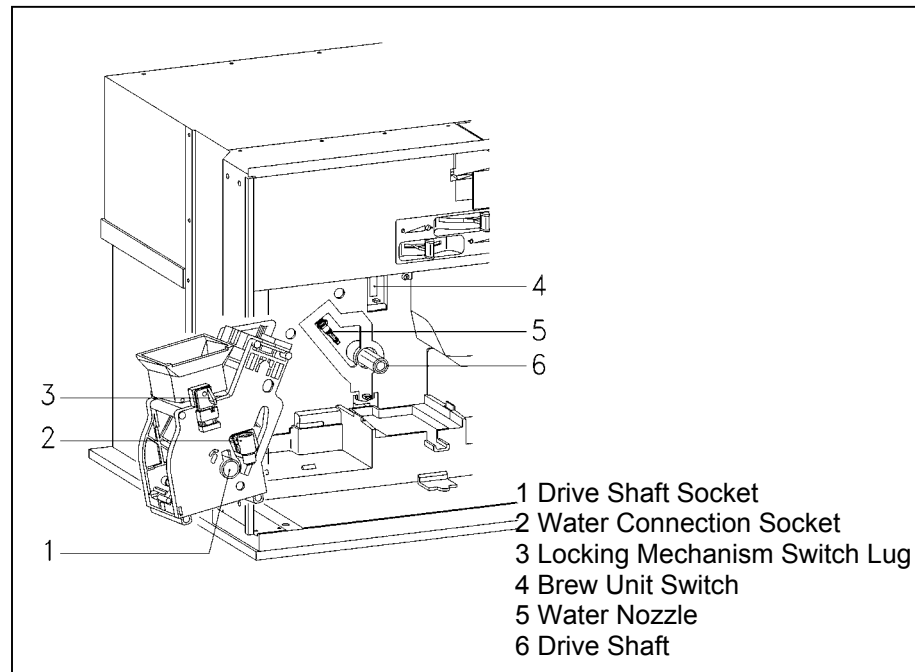


Figure 4-3: Brew Unit connections

Operation

Refer to the figure 4-3.

When the Brew Unit is placed into the appliance, it locks into position. The locking mechanism Switch Lug (Item 3), activates the Brew Unit Switch (Item 4). The Drive Shaft (Item 6) engages with the Brew Unit Drive Shaft Socket (Item 1). The Nozzle (Item 5), supplies the Brew Unit with hot water under pressure. When the Brew Unit is in the brewing position, the socket (Item 2), allows hot water to pass through the coffee.

4.6 Brewing Procedure

1. The grinder fills the dispenser housing until full (as determined by the dispenser switch).
2. The grinder is then switched off.
3. The dispenser flap opens twice (two clicks) via the dispenser solenoid assembly.
4. The ground coffee then falls into the brew unit via the funnel.

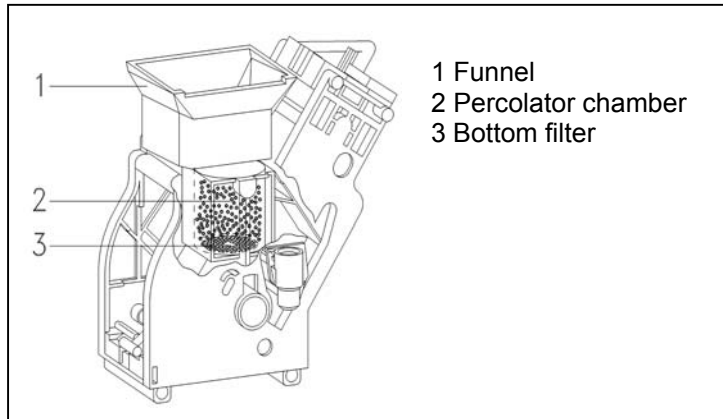
Technical Information

Figure 4-4: Brew Unit Filters

Refer to figure 4-5.

5. The drive tilts the percolator chamber and raises it to the brewing position. The ground coffee is compressed between the Top Filter (Item 2) and Bottom Filter (Item 5).
6. Water then flows through the Water Nozzle Socket, (Item 4). The pump forces the hot water through the Brew Unit and the compressed grounds (Pos 3). Coffee exits the top of Brew Unit via the Outlet (Item 1).

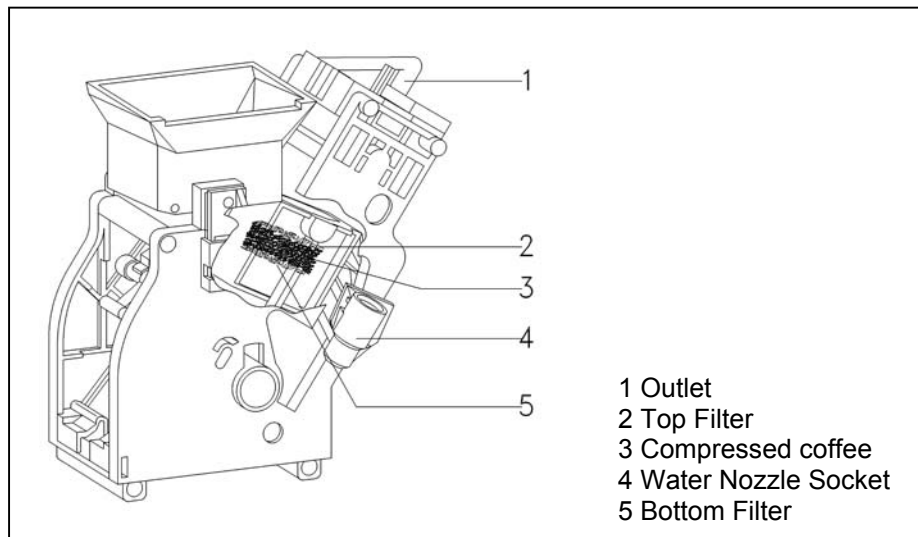


Figure 4-5: Brew unit components.

Refer to figure 4-6.

7. As the drive begin to move back toward the starting (home) position the coffee chamber moves upward and releases the used compressed coffee grounds (puck). Pos. 1.
8. The drive continues and returns the brew unit to its starting (home) position.

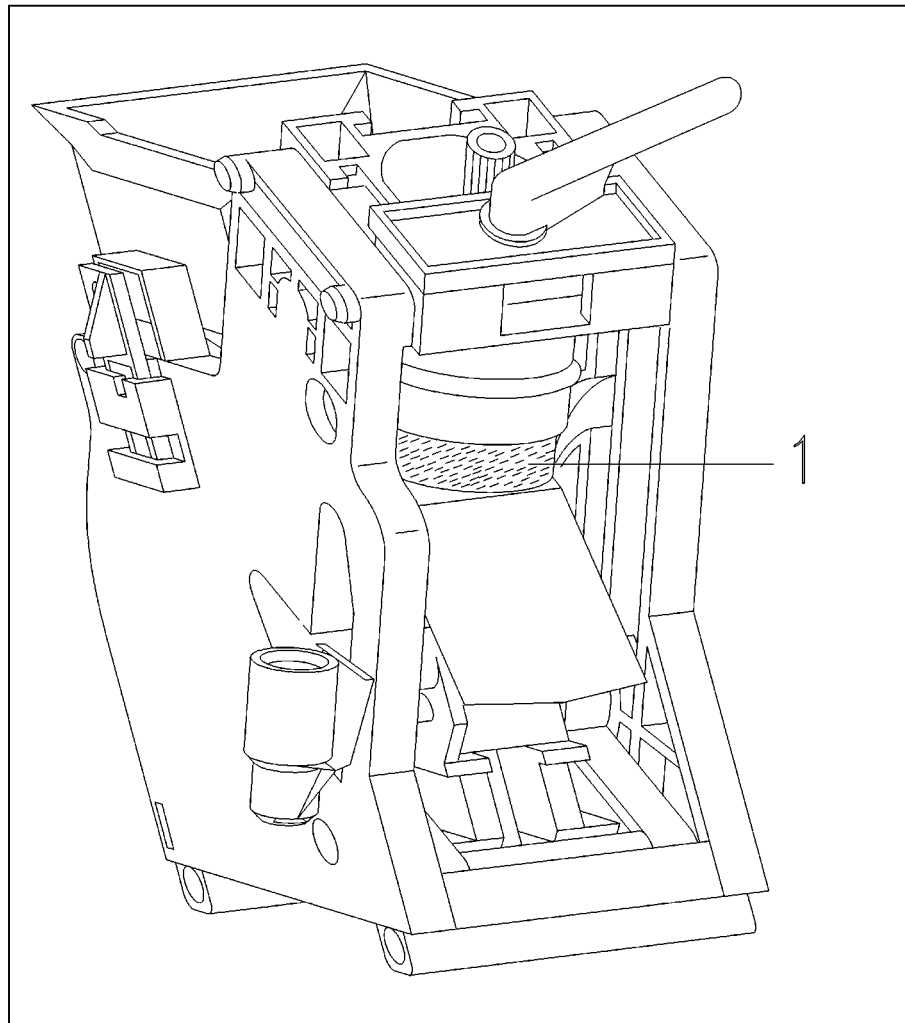


Figure 4-6: Brew Unit, showing compressed coffee “puck”.

Technical Information**4.7 Grounds Container**

After coffee has been prepared, the coffee grounds compressed puck falls into the waste container. The electronic monitors the number of the compressed pucks. After a specific amount is reached, the message “Empty waste unit” is displayed.

4.8 Waste Unit Present Switch

A reed switch is mounted to the bottom of the housing – as shown in the figure 4-7.

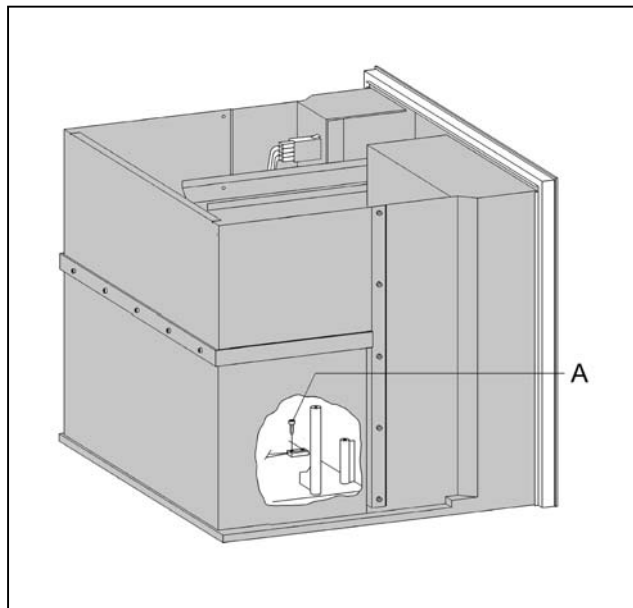


Figure 4-7: Waste Unit Present Switch.

The actuating magnet (Figure 4-8, Item 1) for the Waste Unit switch is fitted in the bottom edge of the container. The electronic monitors whether the waste unit is installed.

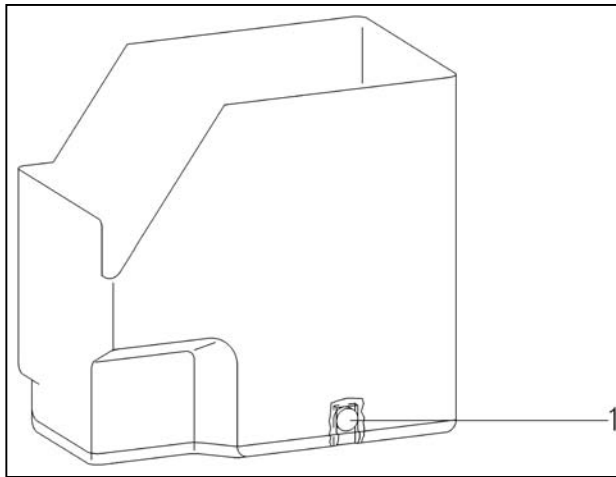


Figure 4-8: Waste Unit. (1) Magnet for Present Switch Actuation.

When the appliance is placed into the Service Mode, the top line of the display shows the switches that have been activated. A “5” is displayed when the Waste Unit is installed and the switch is actuated. For further information refer to section 6 – Service Mode.

Note

On newer Waste Units, an additional magnet has been installed that assist in keeping the waste unit attached to the metal frame inside the appliance.

Technical Information**4.9 Water Tank**

Refer to figure 4-9.

The Water Tank holds the water required for the brewing of the coffee, hot water and steam. When the Water Tank is installed, the sealing ring is pressed upwards allowing water to flow out.

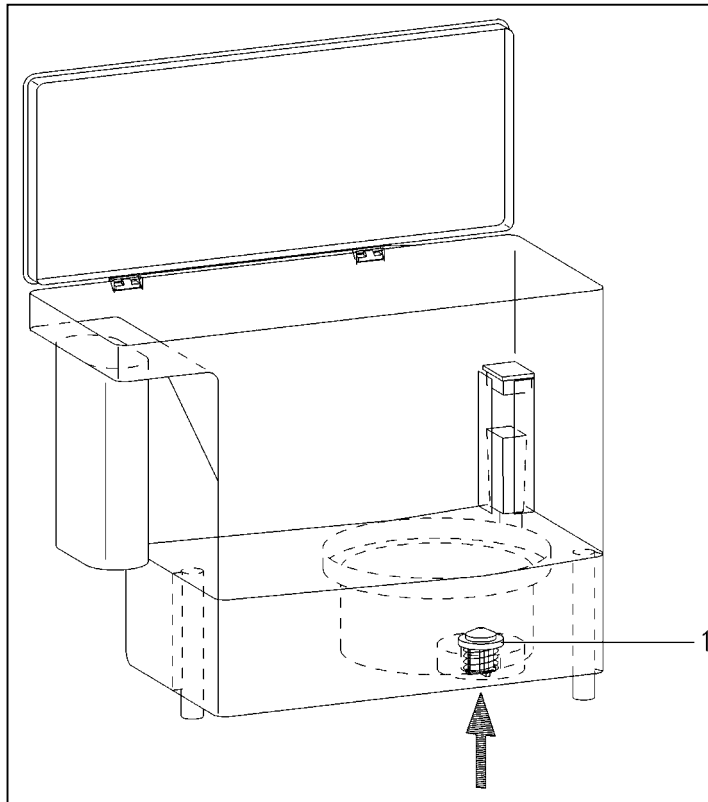


Figure 4-9: Water Tank (1) Valve Assembly.

When the tank is removed from the unit, the spring closes the sealing ring to ensure water cannot flow from the tank when it is out of the appliance for filling etc...

4.10 Water Level Switch

The Water Level Switch is located within the housing (as shown in figure 4-10, Item 1).

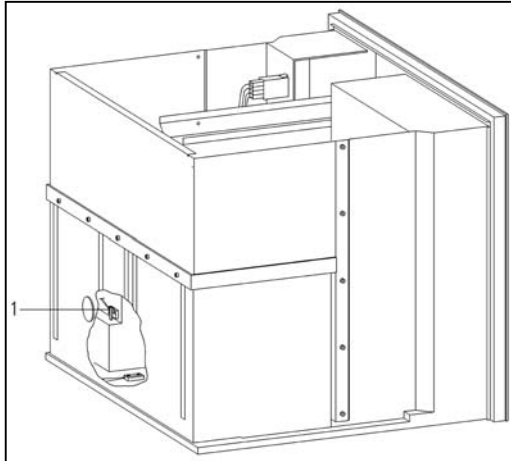


Figure 4-10: Water Level Switch

The actuating magnet for the Water Level Switch is located in the Water Tank as shown below (Figure 4-11, Item 1).

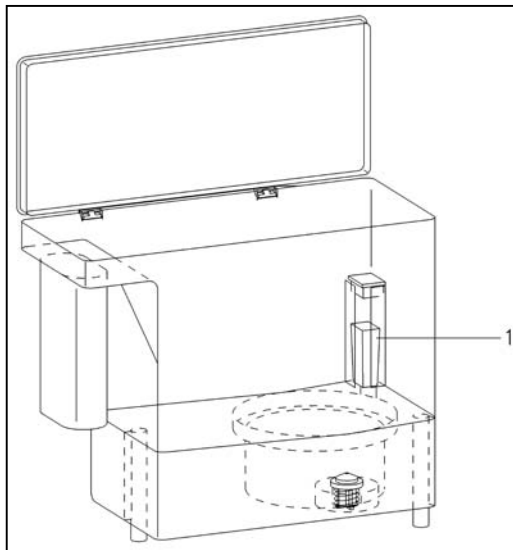


Figure 4-11: Water Level Switch Float

Technical Information

When the water tank is installed, and contains at least 30-33 ounces of water; the Water Level Switch is activated and its contacts close.

If the water quantity drops below the minimum quantity, the water level switch is no longer activated and the contacts open.

After the switch opens, the water passing through the water pump is registered via the flowmeter and recorded by the electronic unit as up to 27 ounces of water is still available.

After the 27 ounces is calculated as being used, the display shows "Fill water tank". To prevent the water pump from running dry, about 3 – 7 ounces of water remains in the tank.

If the appliance is placed into the service mode the top line of the display shows the switches that have been activated. A "7" is displayed when the water tank is installed and filled with water. Refer to section 6 – Service Mode for further information.

4.11 Grinder Assembly

Refer to figure 4-12.

The grinding grade depends on the gap between the Grinding Cone and the Grinding Ring.

The gap is set via an adjustment Lever fitted to the adjustment ring.

The smaller the gap, the finer the coffee grind.

Warning!

To avoid damage to the grinder, the grinder should only be adjusted in small steps.

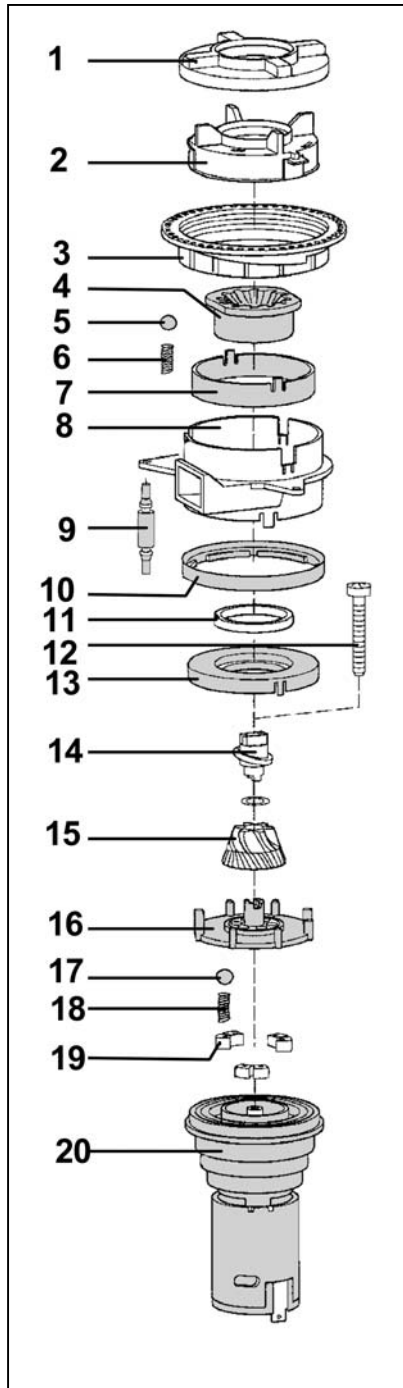


Figure 4-12: Grinder Assembly

- 1. Seal
- 2. Bracket
- 3. Lock Ring
- 4. Ring
- 5. Ball (3) (2mm)
- 6. Spring
- 7. Cover
- 8. Motor Bracket
- 9. Vibration Dampener (3)
- 10. Reinforcement Ring
- 11. Felt Ring
- 12. Cover
- 13. Worm Gear
- 14. Cone
- 15. Mounting
- 16. Ball (3) (5mm)
- 17. Carrier (3)
- 18. Motor

4.12 Grinder - Overload Protection

If the grinder becomes blocked, a slip coupling interrupts the drive between the motor and the grinder.

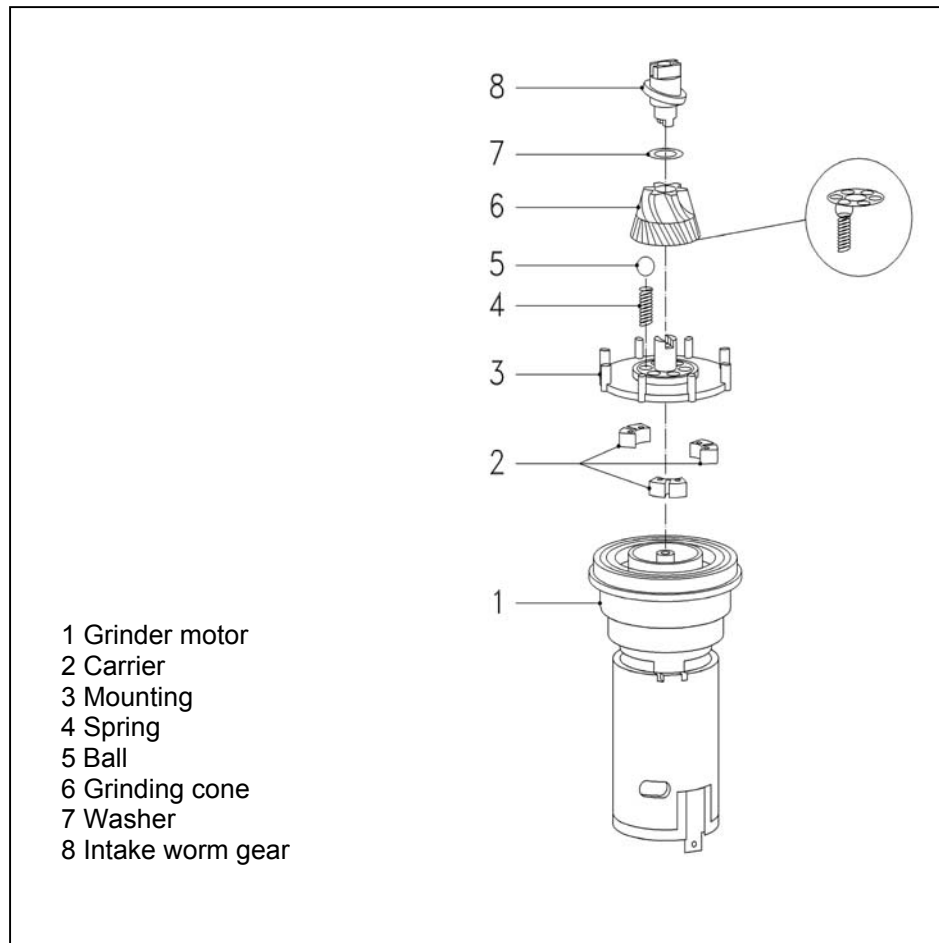


Figure 4-13: Components of the Grinder Overload Protection

Refer to figure 4-13.

The Grinder Motor (Item 1) drives the mounting (Item 3) via the carriers (Item 2). The rotary force is then transferred via the balls, (Item 5) to the grinder cone (Item 6).

Should the Grinder Cone become blocked the balls are pressed into the mounting (as shown below in figure C). The drive force is interrupted; and the worm gear continues to operate via the mounting.

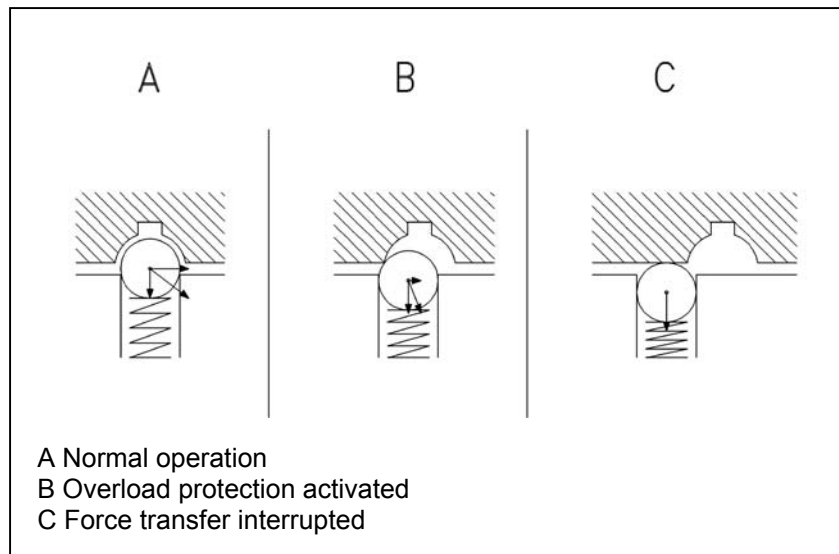
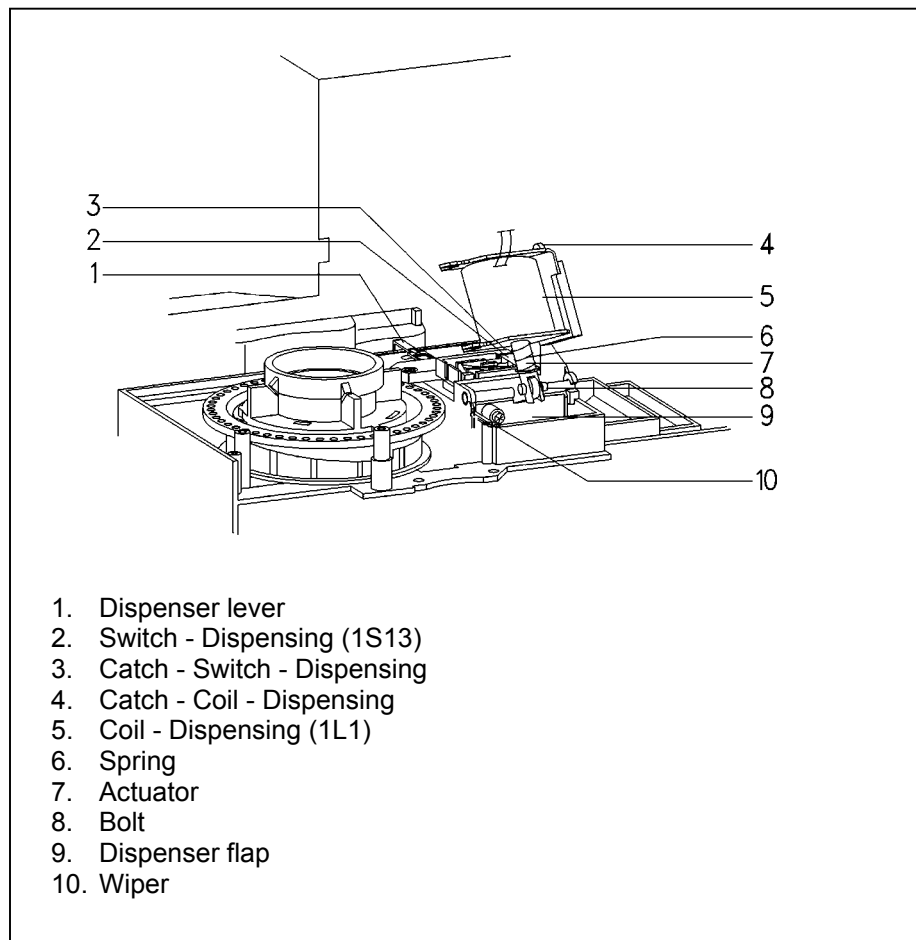


Figure 4-14: Ball Positions into the grinder cone, under different operating conditions.

Technical Information

4.13 Ground Coffee Dispensing**Figure 4-15:** Coffee Dispensing Components

By adjusting the dispenser lever (figure 4-15, Item 1), the position of the switch slide, in the dispenser container is modified. This changes the volume of the dispenser container and hence the quantity of ground coffee that it can hold before it is full. Each slider setting alters the coffee quantity by approx. 0.5 grams.

The grinder fills the dispenser container with ground coffee. When the dispenser container is full, the dispensing switch is actuated and the grinder motor is switched off.

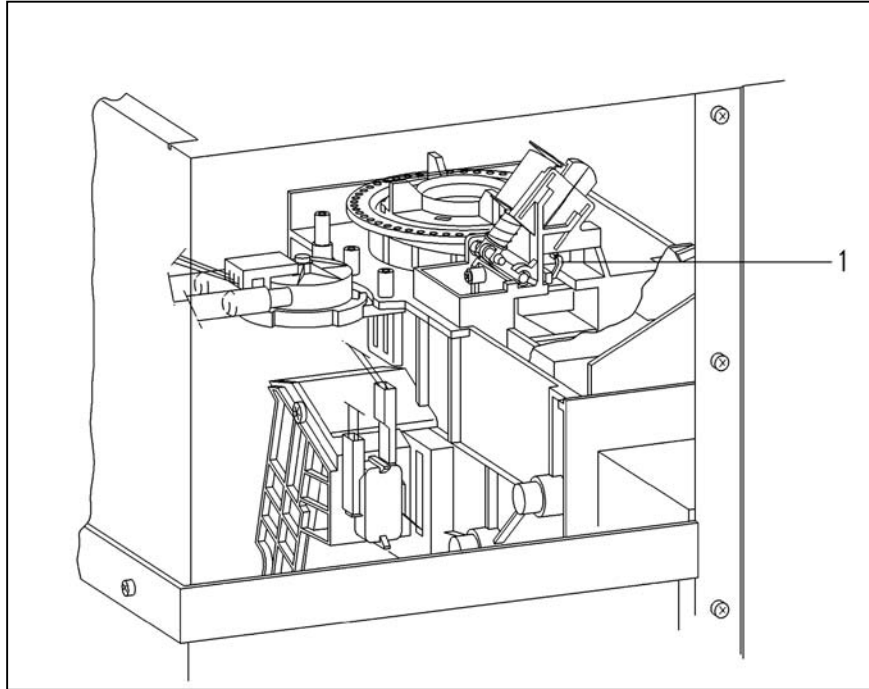


Figure 4-16: Dispensing Lever

To fill the brew unit - the dispensing solenoid is energized twice and the dispenser flap opens twice. The ground coffee drops from the dispenser container into the brew unit.

If the dispenser container is not filled because, there are no coffee beans in the bean holder; the dispenser switch is not activated. The display then shows "Fill coffee beans".

4.14 Dispenser Switch

The service mode can be used to check whether the dispenser switch is activated. With the appliance in the service mode, the top line of the display shows the switches that have been activated. The "3" indicates that the dispenser container is full / switch is actuated. Refer to section 6 – Service Mode for further information.

Technical Information**4.15 Brew Unit Drives**

Refer to figure 4-17.

When the brew unit is placed in the appliance, it locks into position. The locking mechanism switch lug (Item 3) activates the brew unit present switch (Item 4). The drive shaft, (Item 6) engages with the drive shaft socket,

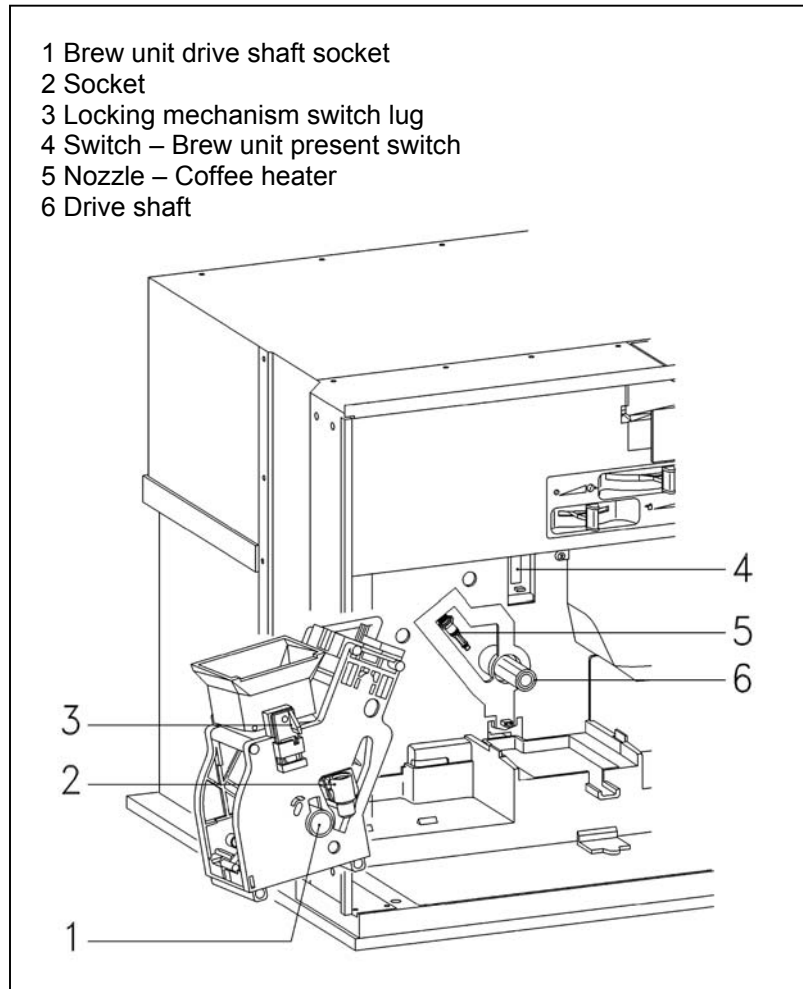


Figure 4-17: Components of the Brew Unit Drive Assembly, Water Connection and Present Switch.

Refer to figure 4-18.

The drive motor (1) is powered by the electronic and turns both the worm gear (3) and the single-stage step-down gear (4). The drive shaft cog gear (5) has two switch actuators for the brew position switch (6) and the home position switch (7). Both switches are monitored by the electronic to determine the position of the brew unit.

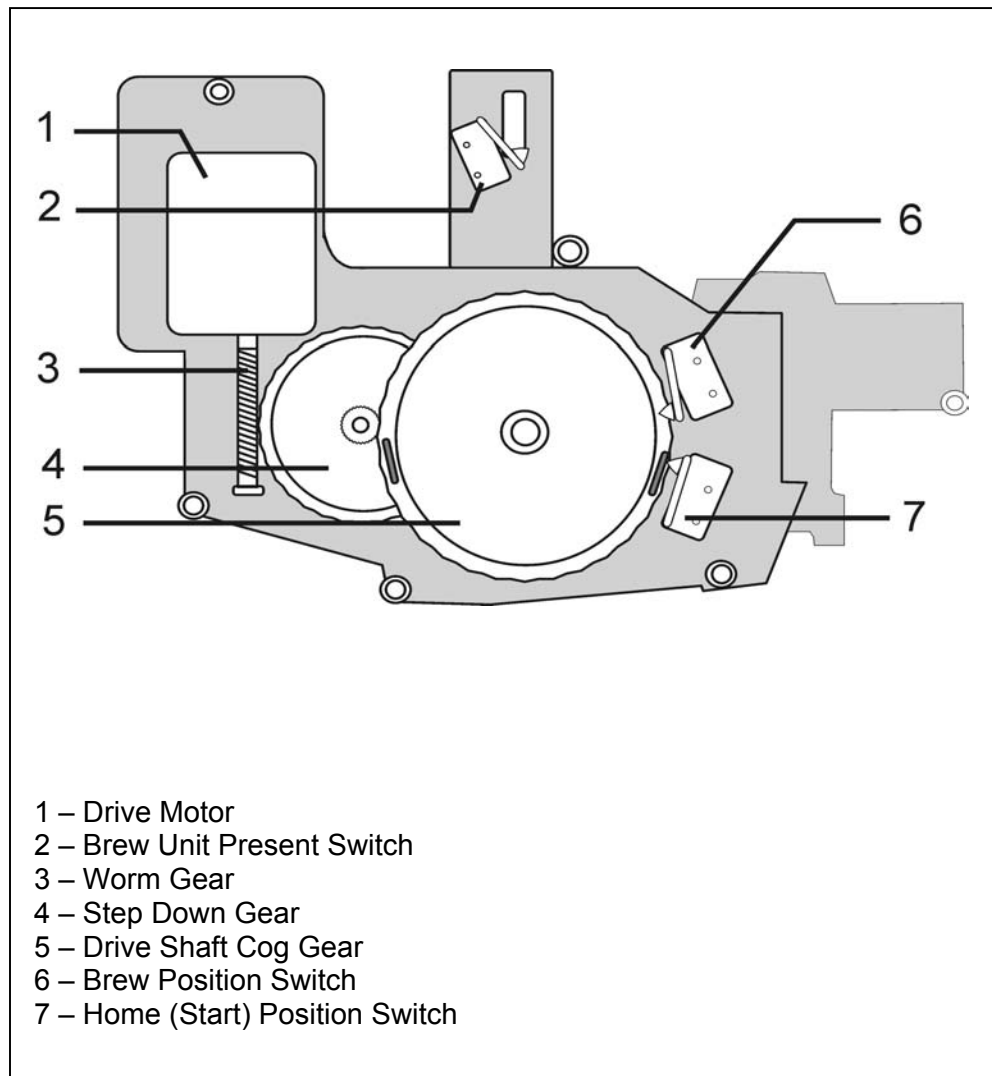


Figure 4-18: Brew Unit Drive Assembly.

Technical Information**4.16 Water Pump**

The pump is self-priming and can develop a pressure of up to approx. 16 bar. For espresso preparation a pressure of approx. 8 bar is required so that the water can be forced through the compressed ground coffee. A further increase in pressure does not improve beverage quality.

The pump is fitted with a safety valve which opens at 16 bar system pressure. If pressure is too high, water is passed from the safety valve via a hose

The pump is connected in series with a temperature limiter. The temperature limiter interrupts the power to the pump should a high temperature develop.

4.17 Flow Meter

All water taken from the water container flows through the flow meter. The flow meter passes signals to the electronic unit proportional to the quantity of water passing through it.

The electronic unit then establishes the quantity of water that has flowed and stores the figure. Approx. 300 pulses from the flow meter indicate a flow of 3 ounces of water.

The electronic unit controls the required water quantity for beverage preparation and ensures that it remains constant. The service mode can be used to check the proper operation of the flow meter. See section 6 – Service Mode for further information.

4.18 Heaters**Coffee / Hot Water Heater 1R1 & 1R2**

Voltage 120V

Power rating 275W and 1090W

Steam Heater 2R1

Voltage 120V

Power rating 1100W

4.19 Flow Through Heaters

The Coffee Flow Through Heater (figure 4-19) has a large heater element; and a small heater element. The Steam Flow Heater has only one heater element (refer to figure 4-20)

Each Flow Through Heater has a Positive Thermal Coefficient (PTC) Temperature Sensor that provides a signal to the electronic unit for temperature control. In addition, a Thermostat is connected in series with the heater element. Should the temperature become too high, the Thermostat interrupts the power to the heater element.

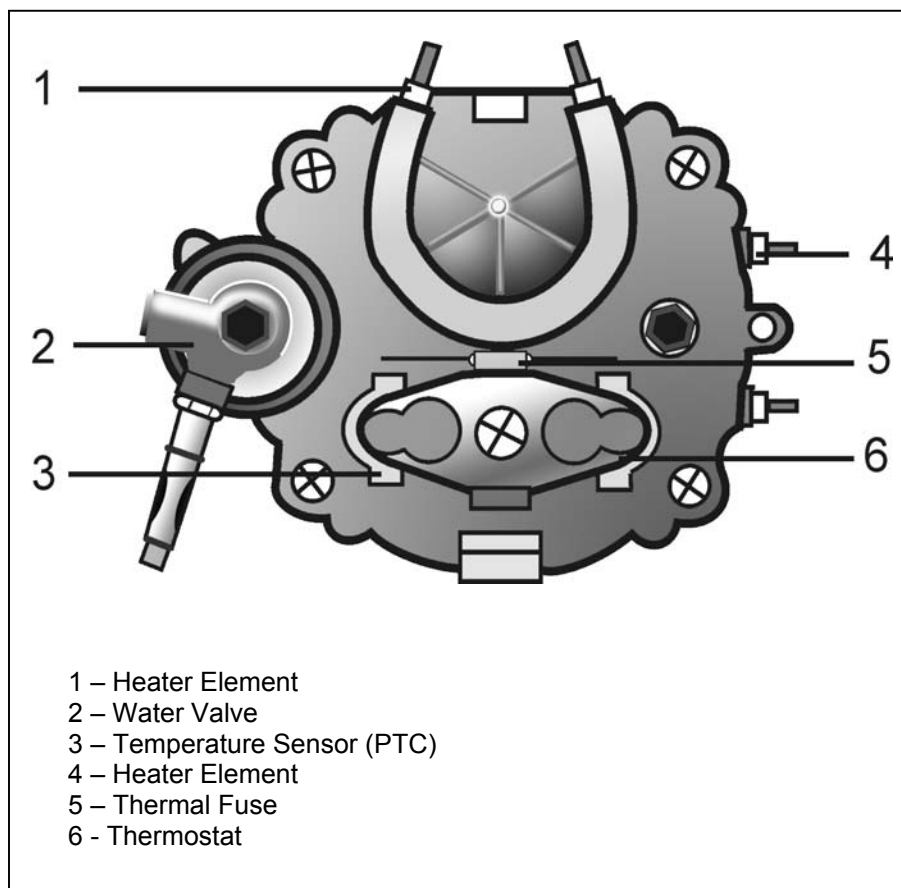


Figure 4-19: Hot Water / Coffee Heater

Technical Information

As a final measure each heating circuit uses a temperature safety fuse (Figure 20 – Item 3). In the event the temperature became too high due to a fault, this fuse blows and cuts the power being supplied to the heater element. Should this fuse blow, the cause must be located and resolved before the fuse is replaced.

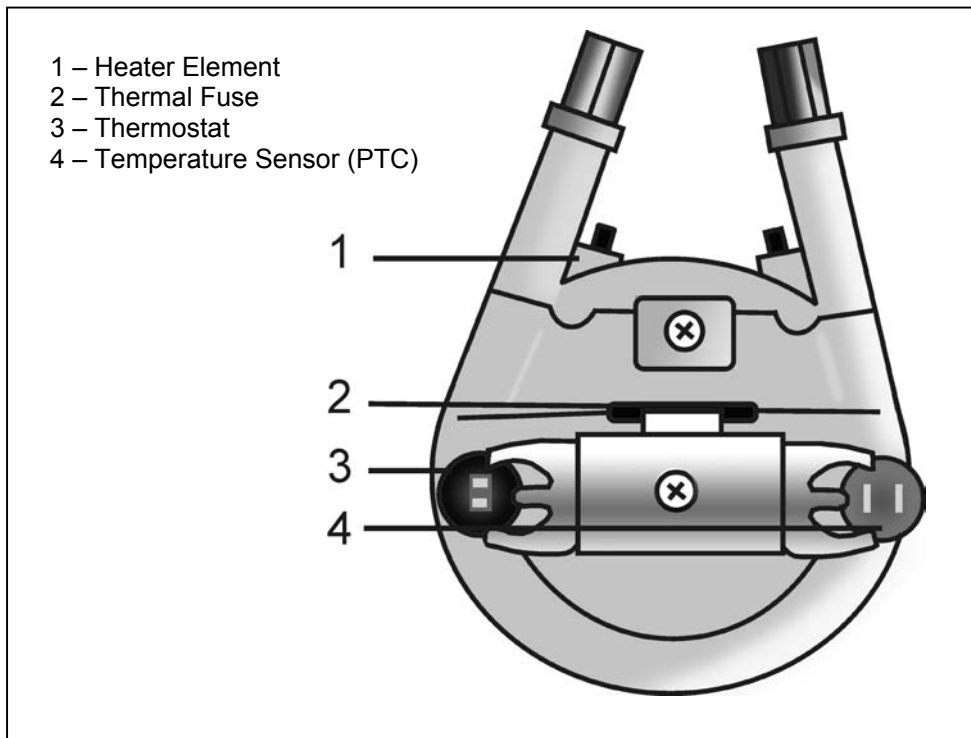


Figure 4-20: Steam Heater

4.20 Water Path

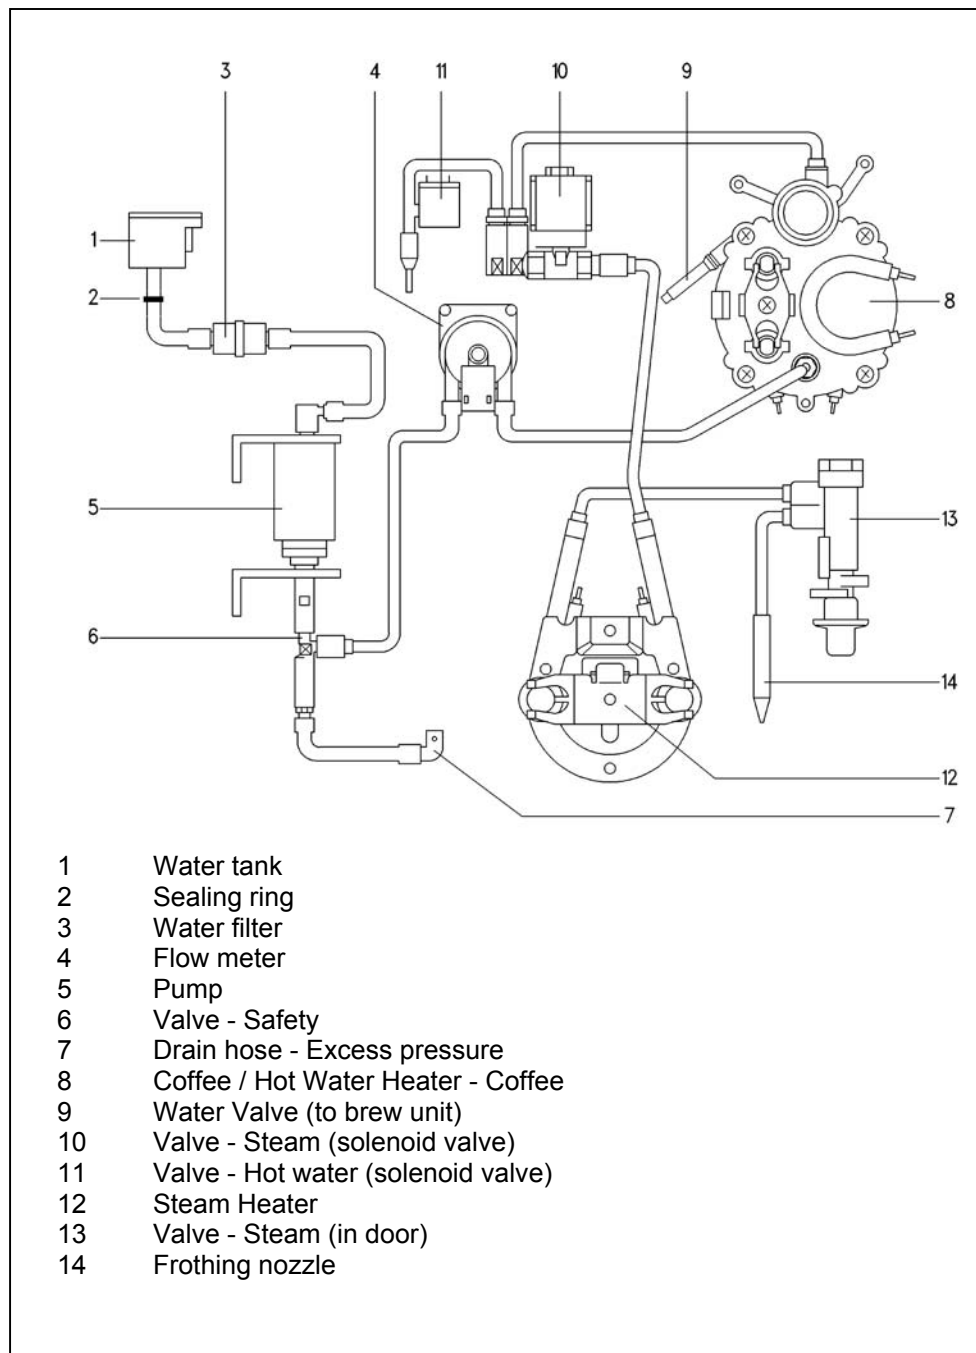


Figure 4-21: Water Path

Technical Information**4.20.1 Water Intake**

The Pump takes in water from the water tank. (The Pump is fitted with a safety valve which opens at approx. 16 bar (232 psi) system pressure. If the pressure is too high and the safety valve opens, water is drained off via a hose to the drip tray).

4.20.2 Water Path - Coffee

The water is then pumped under pressure through the Flowmeter, and through the Coffee Flow Through Heater. The water is then passed through the Water Valve, into the Brew Unit.

4.20.3 Water Path - Hot water

The Pump moves water under pressure through the Flowmeter, and through the Coffee Flow Through Heater. The water is then passed via the Hot Water Valve to the Hot Water Outlet.

4.20.4 Water Path - Steam

The pump moves water under pressure via the Flowmeter and through the Coffee Flow Through Heater. When the user selects steam; the Electronic energizes the Steam Valve. Water continues flowing through the Steam Flow Through Heater. Steam is then dispensed from the frothing nozzle.

4.21 Water Valve

The Water Valve is attached to the output of the Coffee / Hot Water Flow Through Heater. The valve is in a normally closed position.

When the Brew Unit is driven into the brew position the valve mechanically opens and water is supplied to the Brew Unit. This connection must be air / water tight to prevent air from entering the water path, and / or leakage from the occurring.

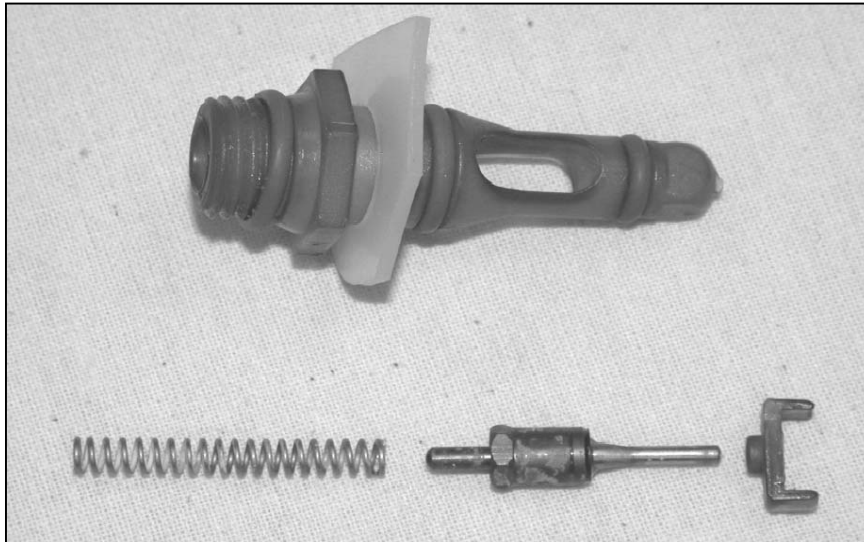


Figure 4-22: Water Valve (disassembled)

The two o-rings that form the seal to the brew unit can be accessed from the front / inside area of the appliance - once the brew unit removed. To access the upper seal, the heater must be removed from the appliance. The Water Valve can be disassembled for service; parts can be replaced individually.

4.22 Electronic Assemblies

4.22.1 Power Electronic

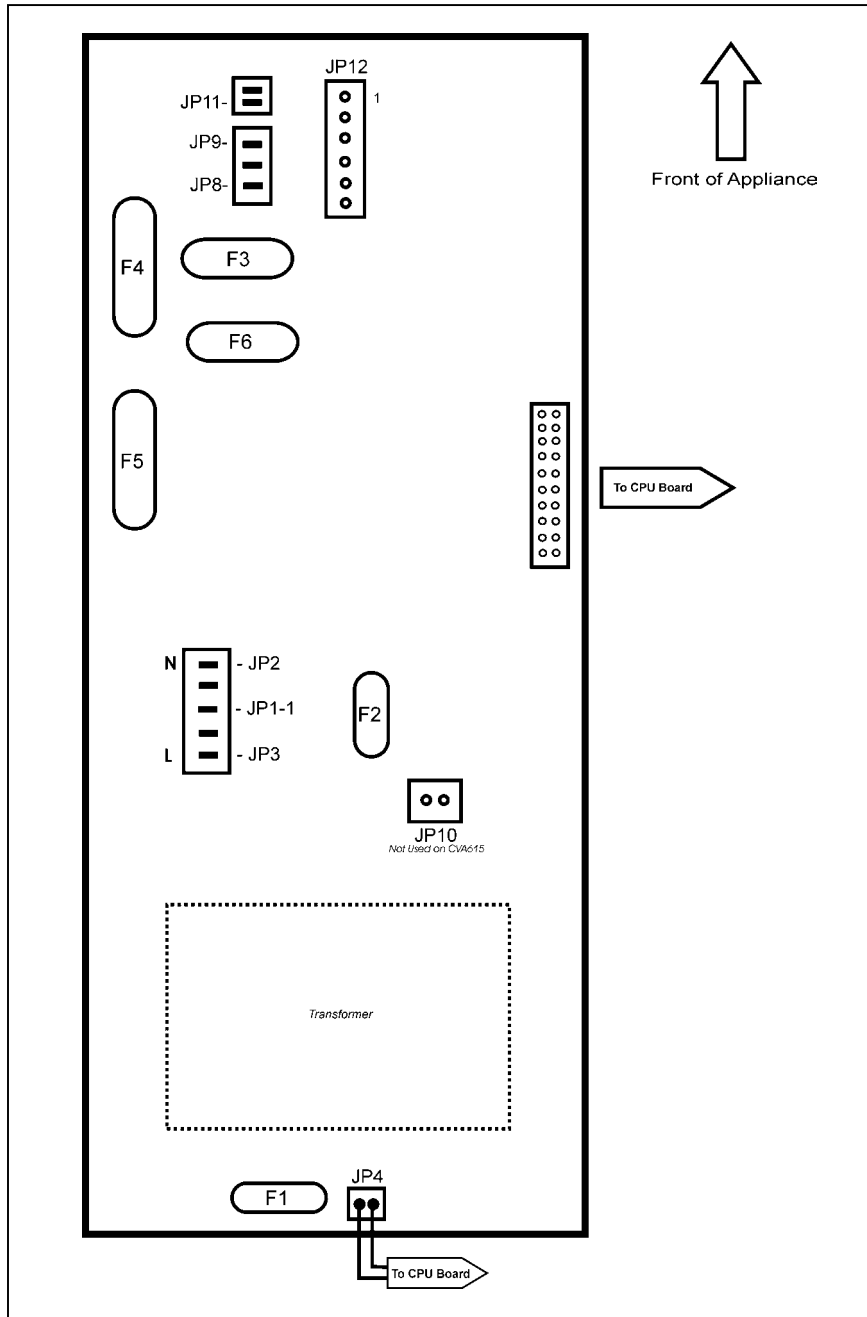


Figure 4-23: Power Electronic Board

4.22.2 CPU Electronic

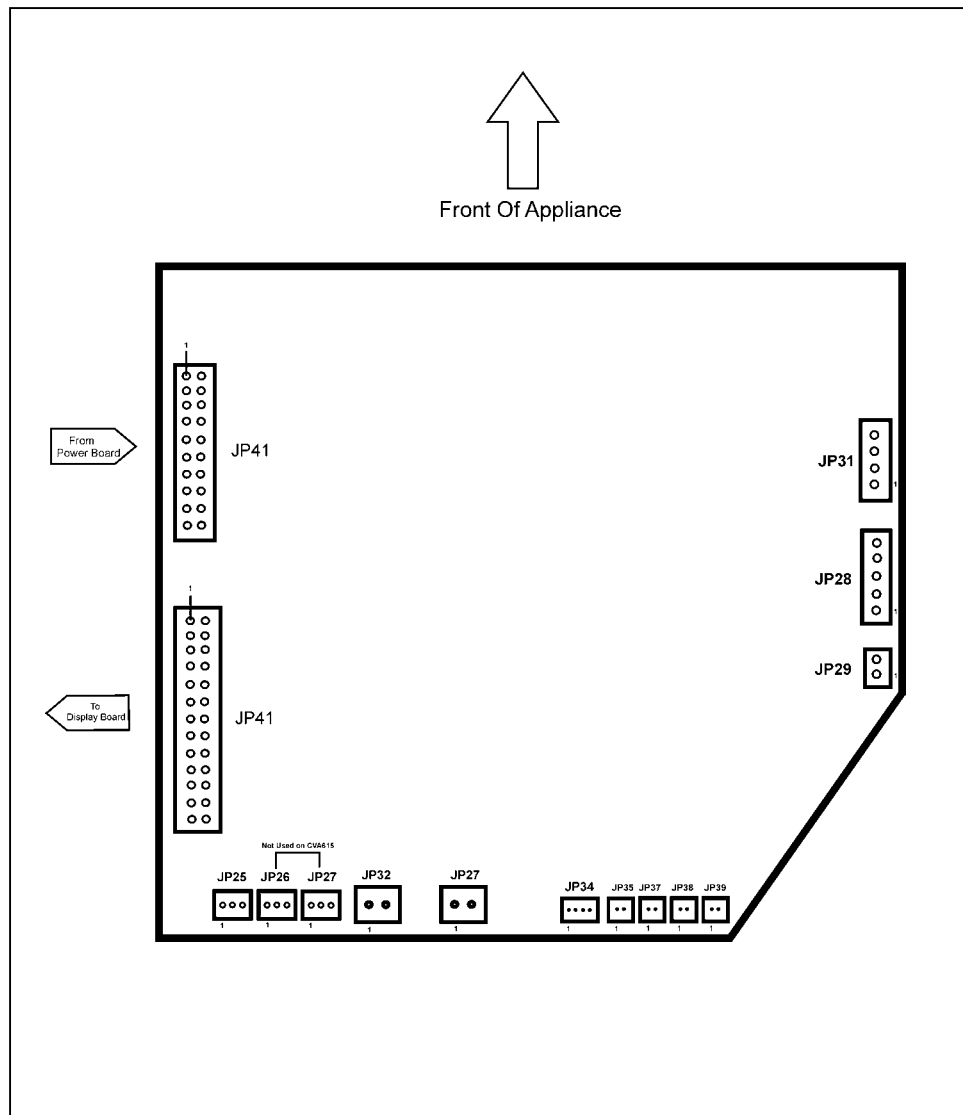


Figure 4-24: CPU (Control) Electronic

Technical Information

5.0 Service and Maintenance

Danger

To avoid the risk of electrical shock, the appliance should be disconnected from the power source, before any service procedures are performed.

5.1 Lid - Removal

1. Remove the Lid Screws, as shown in Figure 5-1.
2. Remove the Lid.

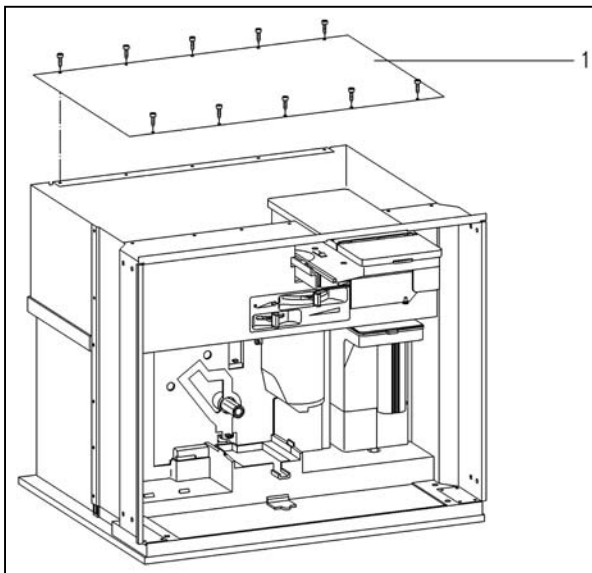
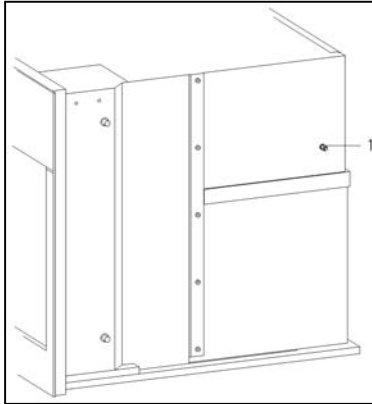


Figure 5-1: Lid with screws


Technical Information

5.2 Interference Suppression Filter (Z1) - Removal

1. Perform: Lid removal (5.1).
2. Remove the Mains Filter Nut (Figure 5-2 - Item 1).
3. Remove the Filter.
4. Disconnect the Mains Filter electrical connections

**Figure 5-2:** Interference Suppression Filter (Z1) Mounting Location**5.3 Rear Panel - Removal**

1. Remove the lid (5.1).
2. Remove the Mains Filter (5.2).
3. Remove the fixing screws from the rear panel.
4. Disconnect the ground connection from the rear panel.
5. Remove the Rear Panel upwards.

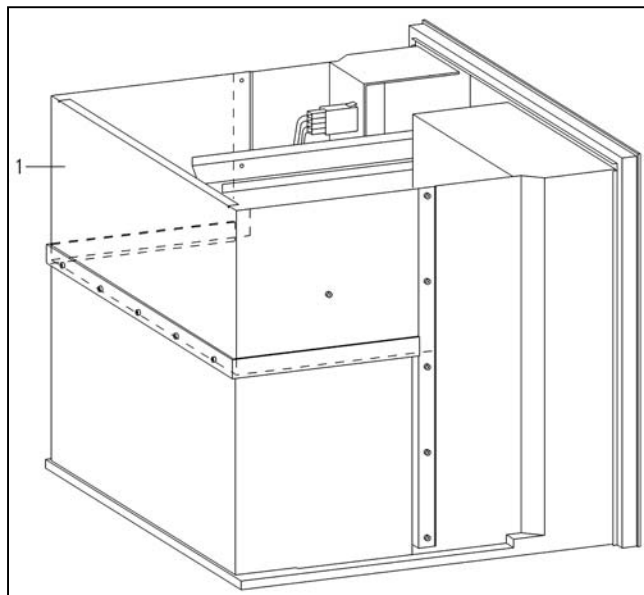**Figure 5-3:** Rear Panel Removal

5.4 Adjustment Slide Switch Frame - Removal

1. Open the door.
2. Pull off the slide switch knobs.
3. Press the retaining lugs inwards with a small screwdriver (Figure 5-4).
4. Remove the frame.

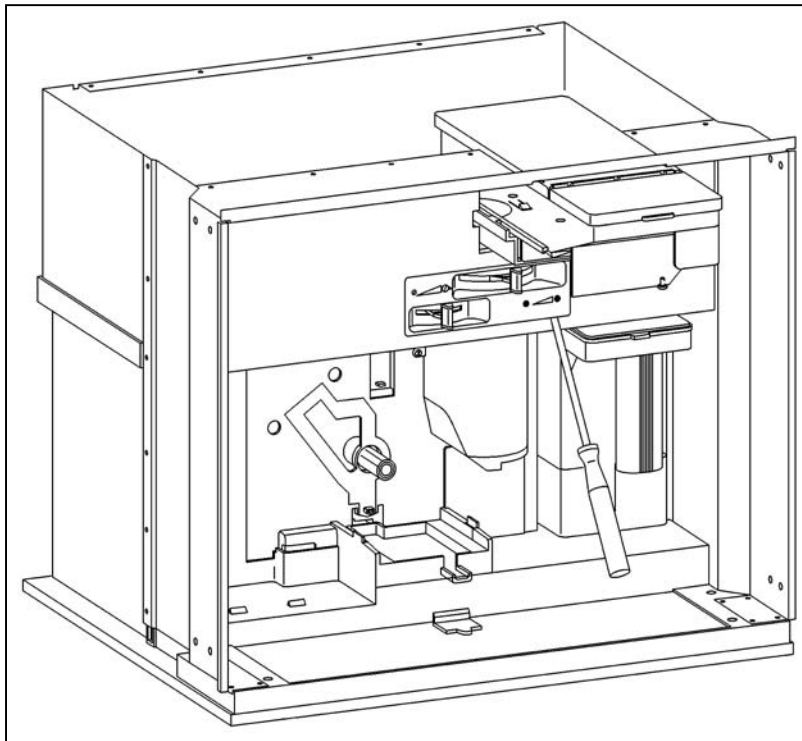


Figure 5-4: Removing the Adjustment Slide Switch Frame (Bezel).

Technical Information

5.5 Door Contact Switch (S24) - Removal

Refer to figure 5-5.

1. Remove the Lid (5.1)
2. Open the door.
3. Disconnect the Door Switch Connections.
4. Press the switch retaining lugs inwards with a small screwdriver.
5. Remove the Door Switch to the front.

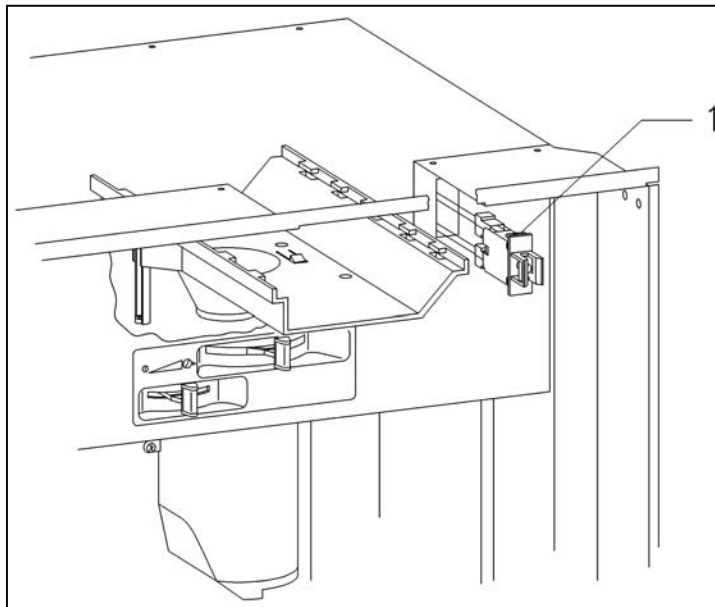


Figure 5-5: Door Switch (shown with appliance door in open position)

5.6 Base Plate - Removal

1. Remove the Lid, Mains and Rear Panel (5.1 to 5.3)
2. Open the door.
3. Remove the Waste Container.
4. Remove the Water Tank.
5. Check if water is present in the Drip Tray with a finger through the opening under the water container.
6. If water is present, remove it using a suitable device.
7. Remove the Brew Unit.
8. Remove the Coffee Beans from their container.
9. Remove the Base Plate Fixing Screws.
10. Tilt the appliance onto its rear.
11. Remove the Base Plate and disconnect the ground wire.

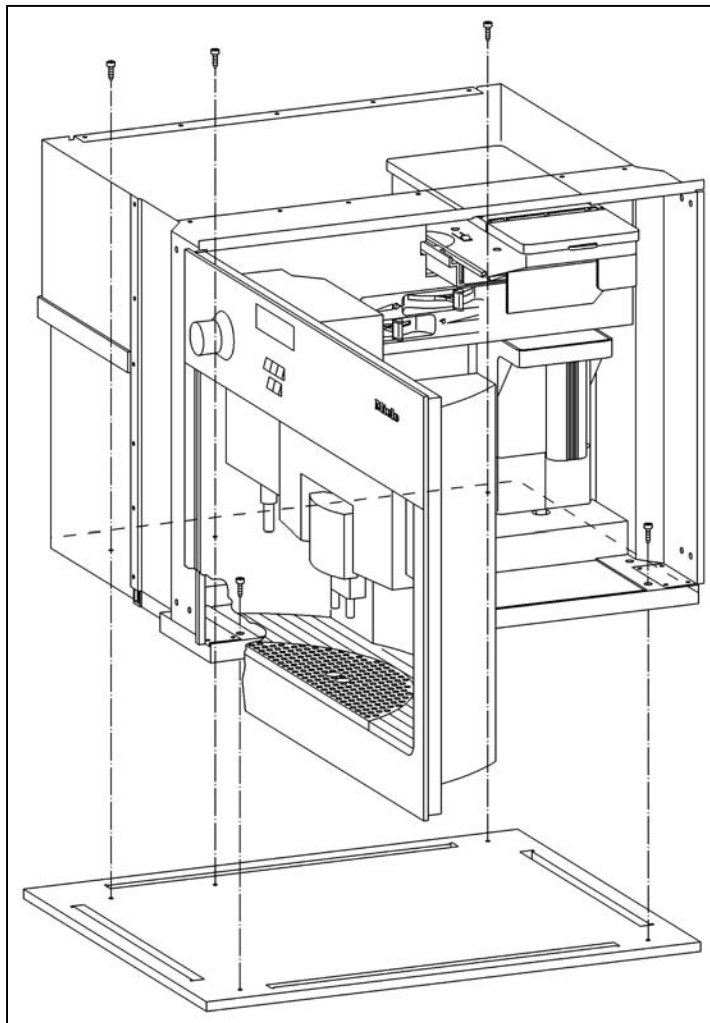


Figure 5-6: Base Plate – Removal.

Technical Information**5.7 Drip Tray - Removal**

1. Remove the Lid, Mains and Rear Panel (5.1 to 5.3)
2. Remove the Base Plate (5.6)
3. Remove the Drip Tray (Figure 5-7).

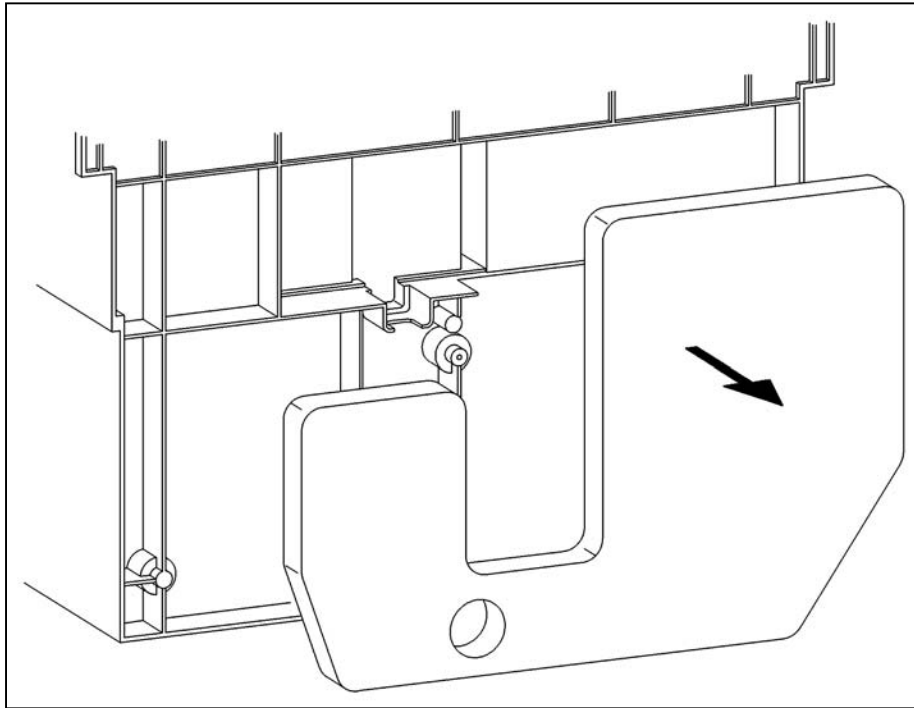


Figure 5-7: Drip Tray removal.

5.8 Overflow Switch Actuator Float - Removal

1. Remove the Lid, Mains and Rear Panel (5.1 to 5.3)
2. Remove the Base Plate (5.6)

Note

Ensure the float is re-installed in the same direction, as when it was removed.

3. Remove the Float.

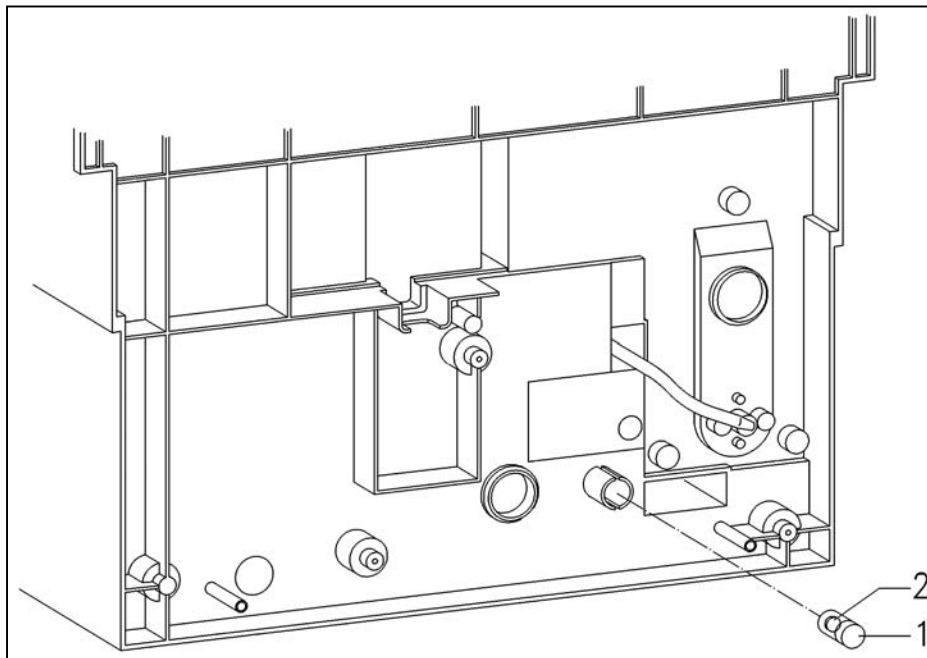
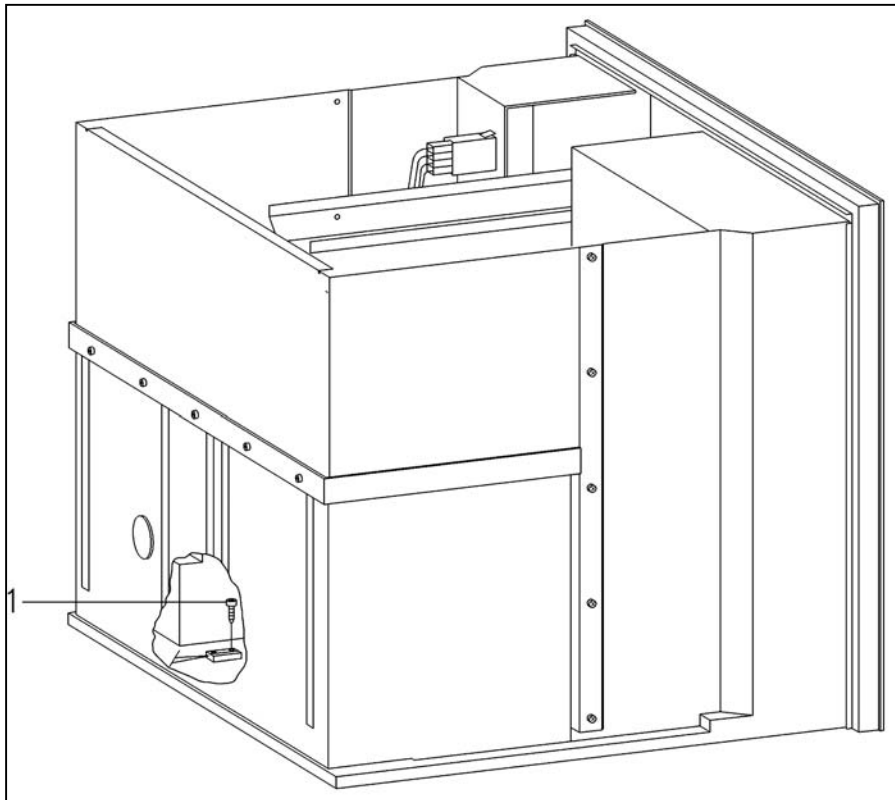


Figure 5-8: (1) Overflow Switch Float. (2) Magnet inside of the float.

Technical Information**5.9****Overflow Switch (B8/3) - Removal**

1. Remove the Lid, Mains and Rear Panel (5.1 to 5.3)
2. Remove the Overflow Switch Fixing Screw (1).
3. Remove the Overflow Switch.
4. Disconnect the Overflow Switch connections from the Electronic.

**Figure 5-9:** Overflow Switch

5.10 Rear Door Panel - Removal

Refer to figure 5-10.

1. Open the door.
2. Remove the Upper Rear Panel Fixing Screws (1).
3. Remove the Lower Rear Panel Fixing Screws (2).

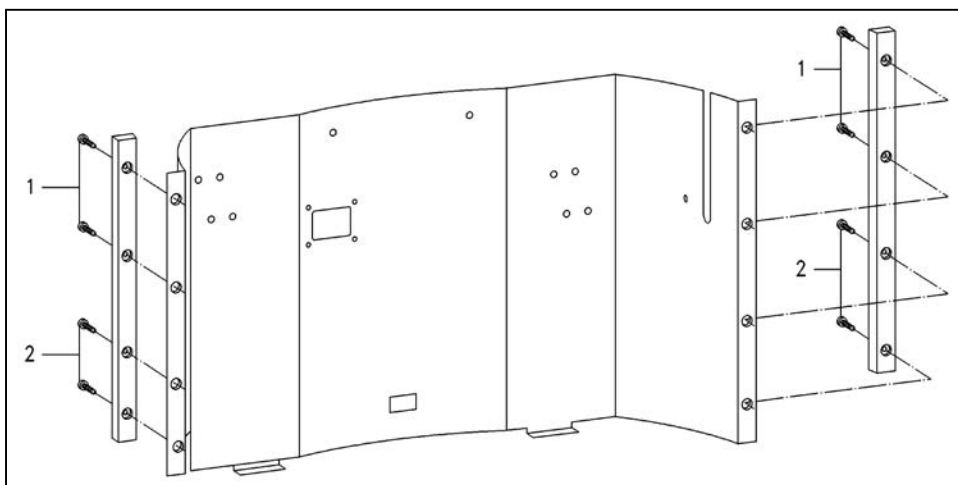
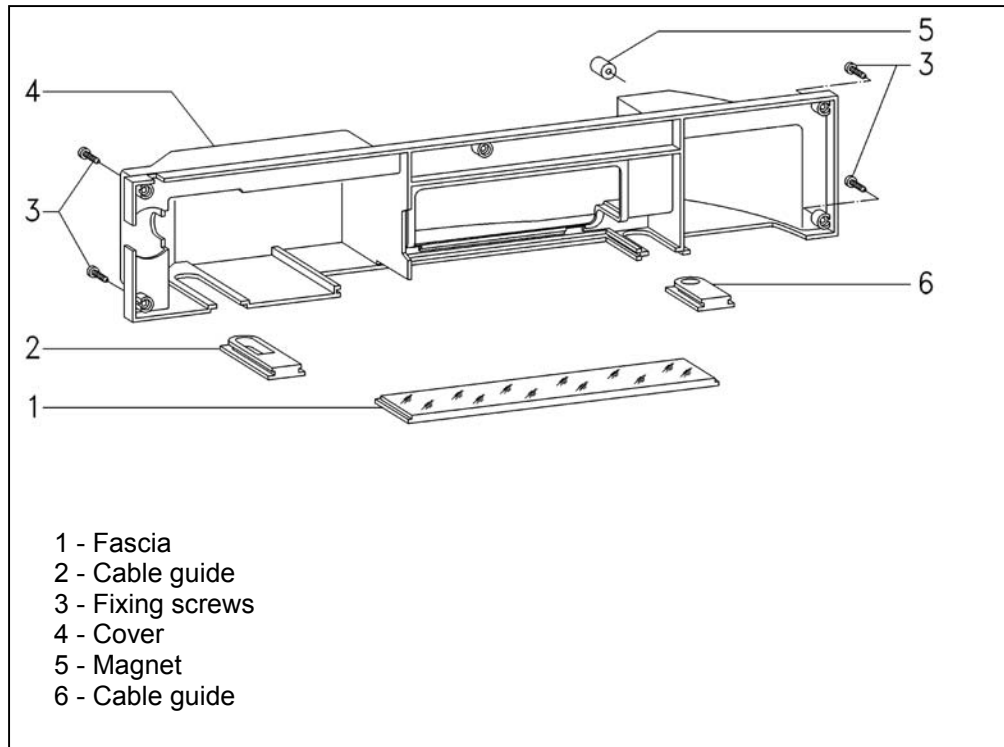


Figure 5-10: Rear Door Panel – Removal.

Technical Information**5.11 Fascia Panel Cover – Removal**

1. Open the door.
2. Remove the Rear Door Panel (5.10).
3. Remove the Cover Fixing Screws (3).
4. Remove the cover.

**Figure 5-11: Fascia Panel Cover Assembly**

5.12 Selector Switch - Removal

Refer to figure 5-14.

1. Open the door.
2. Remove the Rear Door Panel and Fascia Panel Cover (5.10 & 5.11).
3. Unplug the electrical connection from the Selector Switch,
4. Remove the Switch Knob (9).
5. Remove the Selector Switch with its housing from the Fascia.
6. Remove the Selector Switch Fixing Screws.
7. Remove the Selector Switch from its Housing.

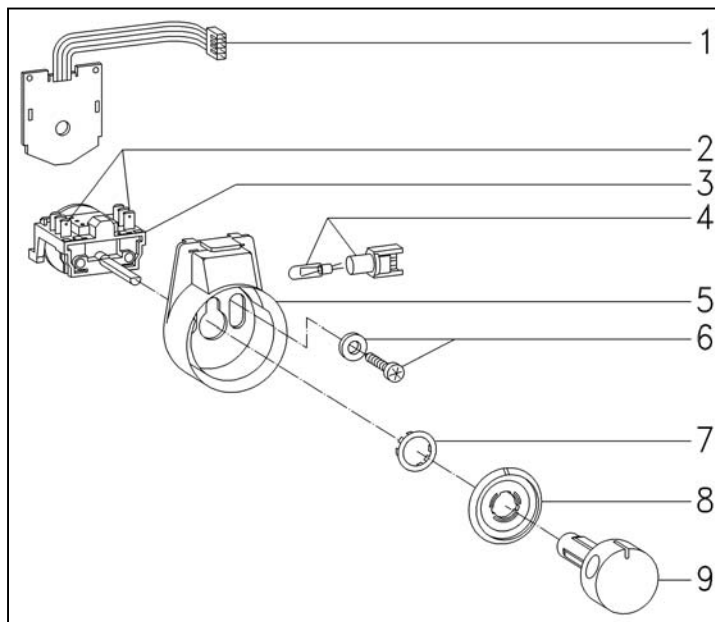


Figure 5-12: Selector Switch

Technical Information**5.13 Display Module Electronic - Removal**

Refer to figure 5-15.

1. Open the door.
2. Remove the Rear Door Panel and Fascia Panel Cover (5.10 & 5.11).
3. Pull off the Pushbutton Knobs (1).
4. Disconnect the Connections from the Electronic (7).
5. Remove the Electronic Unit Fixing Screws (6).
6. Remove the Electronic Unit.
7. Remove the Display Module Fixing Screws (3).

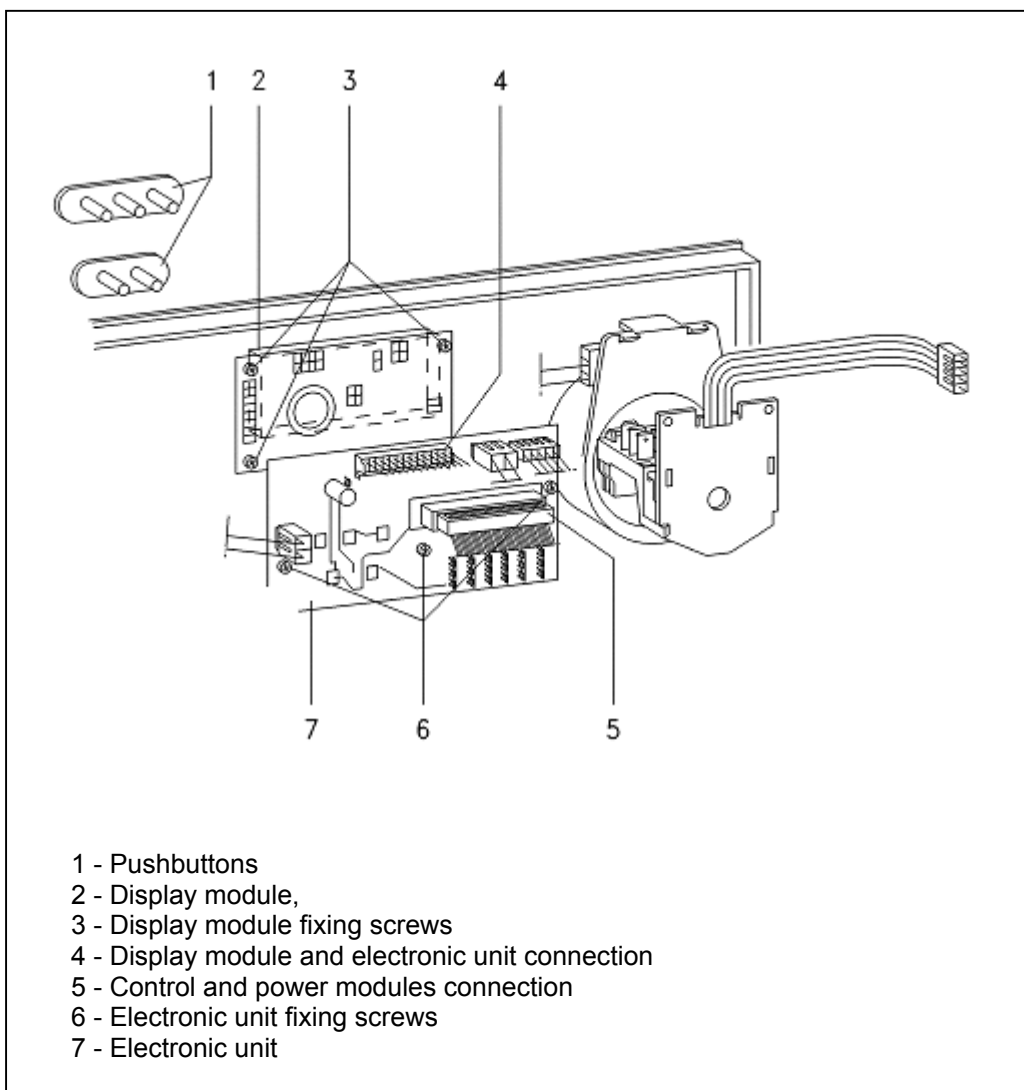


Figure 5-13: Rear View of Front Door with Rear Panel Removed.

5.14 Coffee Dispensing Nozzle - Removal

Refer to Figure 5-14.

1. Open the door.
2. Remove the Grille and Drip Tray from the door.
3. Remove the fixing screws from the white panel under and behind the nozzle.
4. Remove the white panel.

Note

The two screws for the moveable coffee-dispensing nozzle are on the rear of the dispenser unit.

5. Remove the 2 screws from the Coffee-Dispensing Nozzle by hand.
6. Pull out the hose (6), from the outlet, (7).
7. Pull out the moveable coffee dispensing nozzle (9), to its end stop.
8. Unclip the outlet and remove it.
9. Remove the moveable coffee dispensing nozzle.

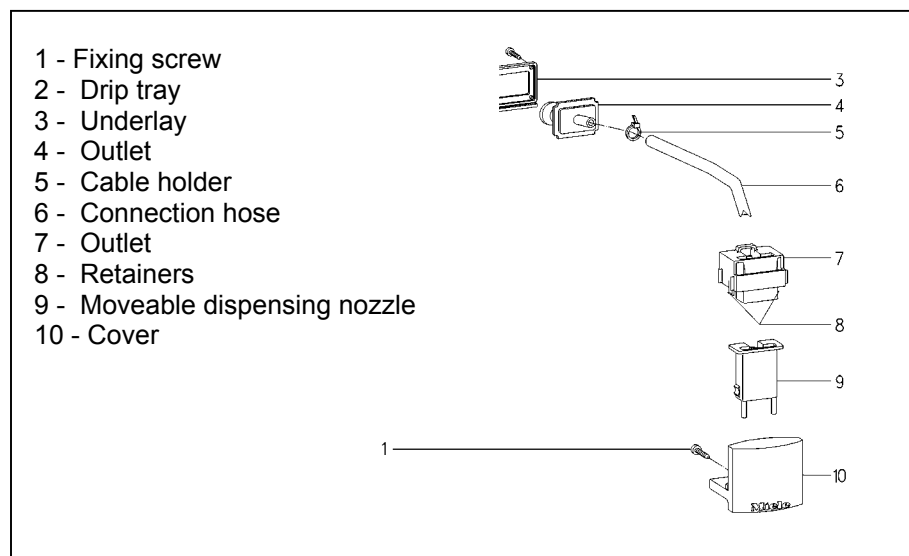


Figure 5-14: Components of the Coffee Dispensing Nozzle.

Technical Information**5.15 Coffee Dispensing Nozzle - Installation**

Refer to figure 5-14.

1. Slide the outlet (7), onto the connection hose (6).
2. Position the moveable coffee dispensing nozzle, (9), in the cover (10).
3. Clip the outlet (7), in the cover (10).

Note

The two screws for the coffee dispensing nozzle should be tightened by hand only as they can easily be over tightened.

4. Fit the Coffee Dispensing Nozzle in the frame.
5. Install the white panel and screws.

5.16 Steam Valve and Steam Valve Switch (S79) – Removal

Refer to Figure 5-15.

1. Open the door.
2. Remove the Rear Door Panel and Fascia Panel Cover (5.10 & 5.11).
3. Pull off the Switch Knob (8).
4. Remove the holder fixing screws (3).
5. Remove the holder.
6. Remove the Steam Valve Switch screws (10).
7. Remove the Steam Valve Switch.
8. Disconnect the electrical connections.

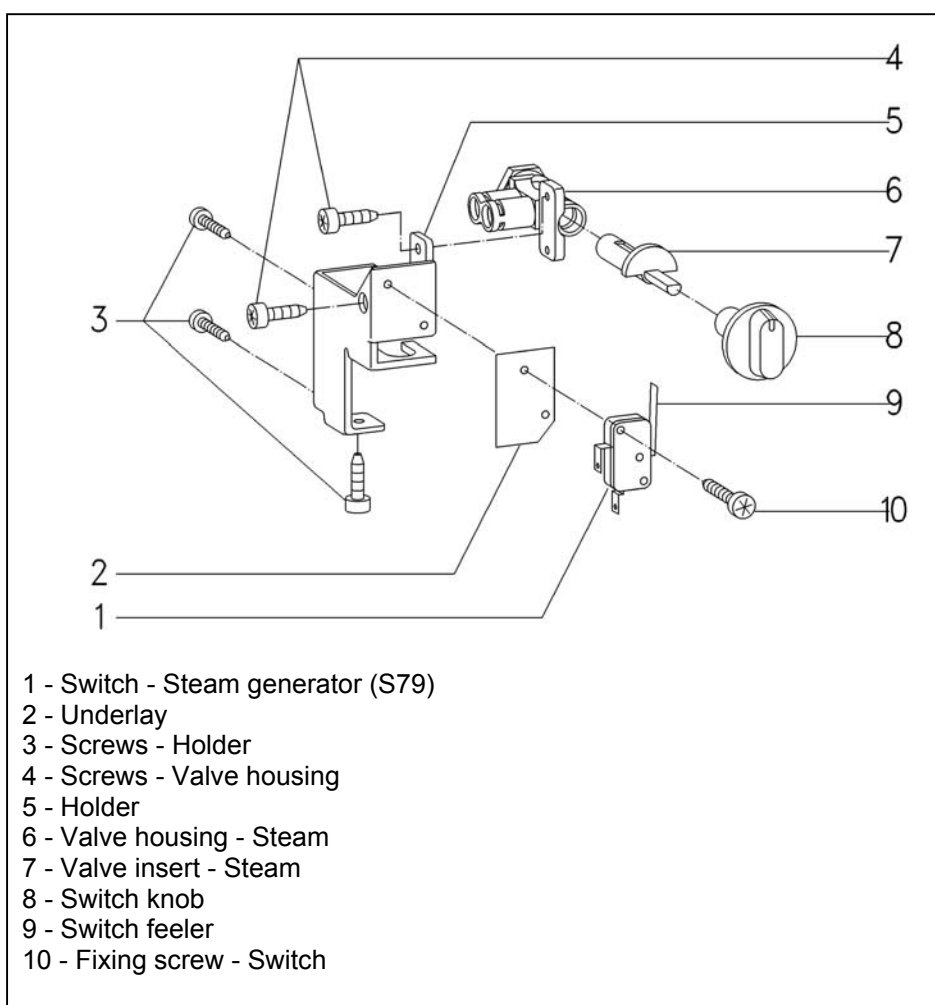


Figure 5-15: Components of Steam Valve and Steam Valve Switch

Technical Information**5.17 Hot Water Nozzle – Removal**

Refer to figure 5-16.

1. Open the door.
2. Remove the Rear Door Panel and Fascia Panel Cover (5.10 & 5.11).
3. Loosen the nut (2).
4. Remove the holder (5).
5. Unscrew the sleeve, (1) from the connector (6).
6. Pull out the Hot Water Nozzle (3), from the connector.

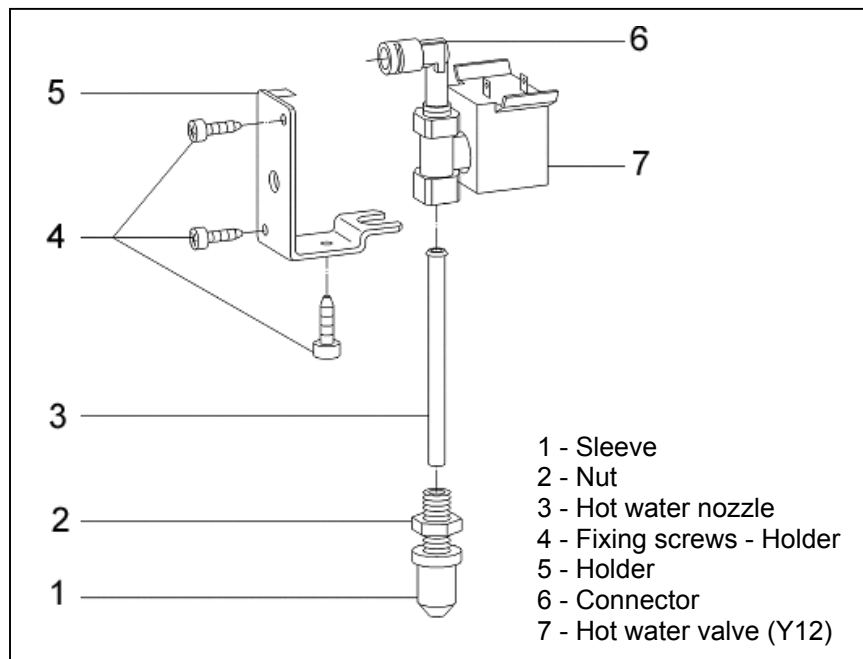


Figure 5-16: Hot Water Valve Components

5.18 Hot Water Valve (Y12) – Removal

Refer to figure 5-16.

1. Open the door.
2. Remove the Rear Door Panel and Fascia Panel Cover (5.10 & 5.11).
3. Disconnect the electrical connection (7).
4. Loosen the Hot Water Valve Nuts.
5. Pull out the Hot Water Valve from the connector (6).

5.19 Checking Temperature at Coffee Dispenser

Warning

To avoid adverse operating conditions:

- Do Not deviate from the procedure.
- Do Not change any other settings or values during this procedure.

1. Set the grinding grade to medium.
2. Set the coffee quantity to medium.
3. Set the Medium Coffee temperature to medium (standard setting).
4. Turn off the appliance.
5. Press and hold the **Small Coffee Button**, **Large Coffee Button** and the **Hot Water Button**. Turn the Selector Switch to the “On with light position”.

The following is displayed...

**LANGUAGE
RINSING**

6. Press the **Medium Coffee Button** 12 times.

The following is displayed:

**DIAGNOSIS
LANGUAGE**

7. Press the **Small Coffee Button** 1 time.
8. Press the **Medium Coffee Button** 2 times.

The following is displayed:

**1 COFFEE
N^oIMPULS.**

350

Note

This value may vary

Technical Information

9. Observe the numeric value in the lower right corner of the display.
 - If a value of “350” is displayed; proceed to step 14.
 - If the value is not 350; proceed to step 10.
10. Press the **Small Coffee Button** 1 time. A blinking box will appear at the end of numeric value.
11. Set the value to “350” as follows
 - Press the **Large Coffee Button** to increase the value
 - Press the **Medium Coffee Button** to decrease the value

Note

Each press of the Large or Medium Coffee will change the displayed value by 1. (i.e. 347...348...349...350)

12. Press the **Small Coffee Button** 1 time, to store the value.
13. Turn the selector switch to the “**Off**” position.
14. Turn the selector switch to the **On** or **On with Light** position.
15. Prepare 4 coffees (medium size) one after the other.
16. When the fourth coffee is being dispensed, hold the sensor probe directly in the flow of coffee. The temperature at the coffee dispenser should be 171° F - 194° F .

5.20 Brew Unit — Removal (in start/home position)

1. Open the door.
2. Remove the Waste Container.
3. Hold the handle and press on the part marked PRESS.
4. Gently pull outward on the Brew Unit to remove it from the appliance.

5.21 Brew Unit — Removal (NOT in start/home position)

Warning

This procedure will remove the brew unit from the appliance without damages. However., after the brew unit is removed; the drives must be carefully inspected (and repaired if necessary) then placed into the start (home) position via the service mode.

Before proceeding close the front door, turn the power on to initiate a drive reset during the start-up sequence.

Once “Ready...” is displayed; open the front door and attempt to remove the brew unit. If the brew unit still cannot be easily removed, perform the following:

Refer to figures 5-17 and 5-18 on the next page...

1. Open front door - Remove the Waste Container.
2. Locate the Philips screw (Figure 5-17, Item 2).
3. Remove the Philips screw.
4. Use a small flat tip screwdriver to lift up on the locking tab (Figure 5-18).
5. Grasp the brew unit handle and pull the brew unit out till the connection socket on the brew unit (Figure 5-17, Item 1) unsnaps from the brew unit and remains inside the appliance attached to the water nozzle.
6. Remove the Brew Unit.
7. Slide the connection down to remove it from the appliance.
8. Re-install the connection socket to the Brew Unit.
9. Carefully inspect the drives for defects.
10. Test the Home Position Switch and Brewing Position Switch for proper operation.

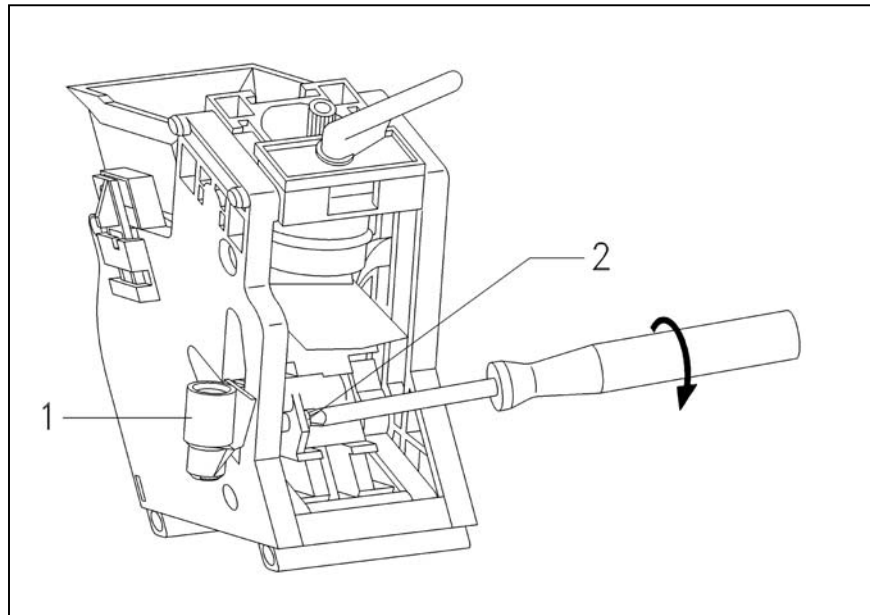
Technical Information

Figure 5-17: Brew Unit (1) Connection Socket (2) Retaining Screw

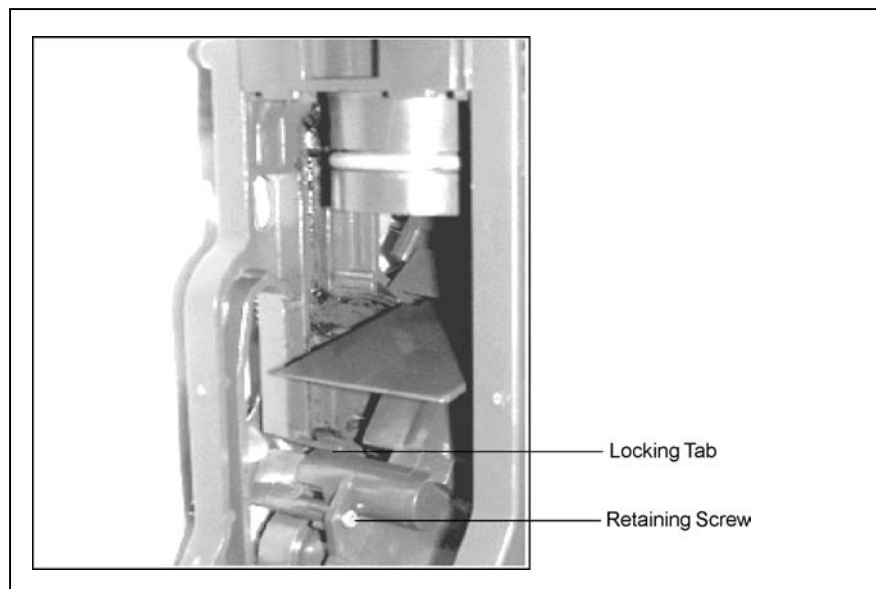


Figure 5-18: Brew Unit Connection Socket Retaining Screw and Locking Tab.

5.22 Brew Unit - Installation

1. Remove the Waste Container.
2. Slide the Brew Unit into position in the appliance until the locking mechanism engages with the drive mounting plate.

Note

Do not press the part marked PRESS during the installation of the brew unit.

5.23 Brew Unit – Cleaning Procedure

Note

- Clean the Brew Unit by hand only, it SHOULD NOT be cleaned in a dishwasher.

- Lubricate the Brew Unit with silicon every 500 cups

1. Remove the Waste Container.

Note

The Brew Unit can only be removed after the Waste Container has been removed from the appliance.

2. Grasp the brew unit by the handle and press with the thumb on "PRESS". (Figure 5-19, Item 1).

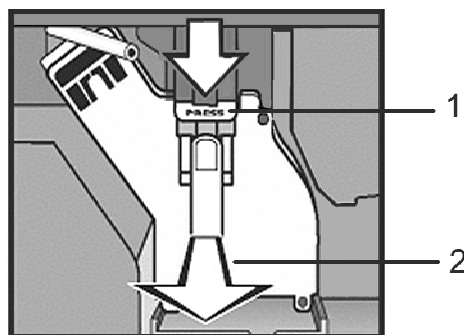


Figure 5-19: Brew Unit – Removal for Cleaning

3. Pull outward to remove the Brew Unit (Figure 5-19, Item 2).

Technical Information

4. Clean the Brew Unit thoroughly under running warm water without detergent.
5. Rub away coffee residues from the steel filters with a sponge.
6. Dry the funnel to prevent ground coffee from sticking.
7. After cleaning press "PRESS".
8. Remove the Waste Container (if re-installed).

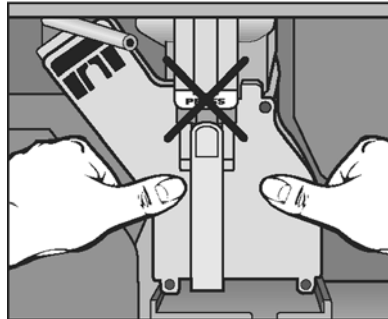


Figure 5-20: Brew unit installation

8. Push the brew unit in the track straight into the appliance without pressing "PRESS" until it clicks in place (see figure 5-20).

5.24 Brew Unit – Filter Cleaning

1. Remove the Brew Unit.
2. Wipe away coffee residues from the steel filter in the funnel of the brew unit with a sponge.
3. The filters can be removed for thorough cleaning.
4. Fit a 5mm allen wrench to the connection point in the brew unit. Turn counterclockwise while supporting the chrome filter from below. Remove the filter by lifting it from the brew unit.
5. Access the second filter by placing a long shaft Philips Screwdriver through the center of the funnel and remove the screw in the center of the filter.
6. Manually move the brew unit into the "brew position".
7. Turn brew upside down – filter will fall out.
8. Clean both sides of the filter with hot water and dry.
9. Re-install the second filter back in position.
10. Manually move the Brew Unit to the "home position"
11. Re-install the Philips screw in the center of the filter.
12. Return the first filter to the brew unit and secure by turning the allen wrench clockwise.

5.25 Brew Unit - Degreasing via the Rinse Cycle

Note

The natural oil found in coffee can cause the Brew Unit to clog. The message "Rinsing cycle" will flash in the message window after 500 cups to remind you to clean the unit using "cleaning tablets"

These specialty-cleaning tablets can be purchased from Miele.

1. Remove the Waste Container.
2. Remove the Brew Unit and put the detergent tablet in the brew unit funnel.

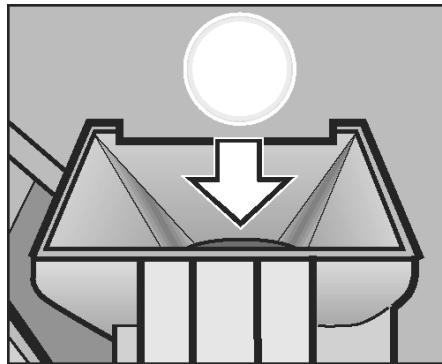


Figure 5-21: Cleaning tablet being placed into the brew unit funnel.

3. Return the brew unit and waste unit to the appliance and close the door.
4. Set a 25 oz. container under the coffee dispensers.
5. Press the rinse/ pre-warm button. (The unit must be pre-heated and ready to use otherwise the button will not respond.)
6. The display will read:

**RINSING
RINSING CYCLE**

7. Press ▼ to select "Rinsing cycle" with the asterisk.

Technical Information

8. Press ENTER. The display will read:

RINSING CYCLE

A small amount of water will flow out the coffee dispensers. After a pause more water will flow out. This process will run 4 times, dispensing 2 cups (17 oz) of hot water. The whole process lasts about 5 minutes.

At the end of the cleaning cycle the display will read:

**SELECT PRODUCT
READY FOR USE**

The Brew Unit is now clean and ready to use.

5.26 Brew Unit – Lubrication

1. Remove the Brew Unit.

Note

Check that the Brew Unit is in the basic position with the funnel slightly lifted and the socket in vertical position.

2. Refer to figure 5-22; lubricate the following:

- A: Joints
- B: Axle
- C: Tracks
- D: Gasket

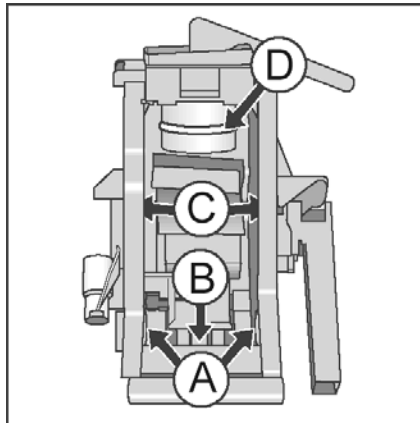


Figure 5-22: Brew Unit lubrication points

3. Refer to figure 5-23; lubricate the following:

- E: Bolt Assembly
- F: Joints

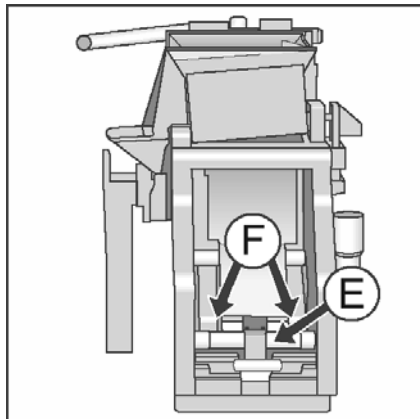


Figure 5-23: Brew Unit lubrication points

4. Return the brew unit into the appliance.

Technical Information

**5.27 Brew Unit – Manual Reset to “Home Position”
(with brew unit not installed in appliance)**

Refer to figure 5-24.

1. Press on the latch **A**; and press the funnel down **B**.
2. Push the connection piece to the far left position **C**.
3. Press "PRESS" once.

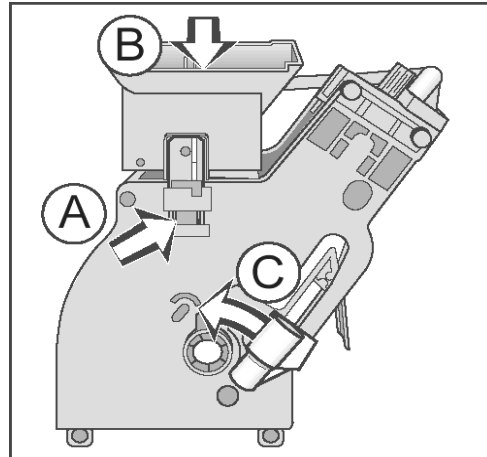


Figure 5-24: Moving the Brew Unit to “home position”.

4. The “Home” position (Figure 5-25) after resetting the Brew Unit.
The Brew Unit can now be reinstalled into the appliance.

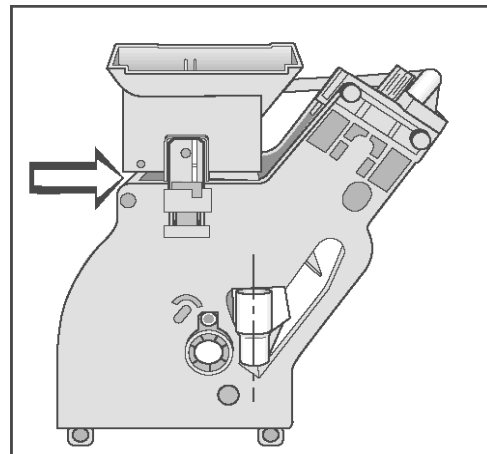


Figure 5-25: Brew Unit in reset position.

5.28 Brew Unit Creamer Valve - Removal

1. Remove the Brew Unit
2. Remove the output fixing screws.
3. Remove the output.
4. Remove the spring and Creamer Valve.

5.29 Brew Unit Handle - Removal

1. Remove the Brew Unit from the appliance.
2. Press the handle retaining lugs inwards (Figure 5-26).
3. Remove the handle.

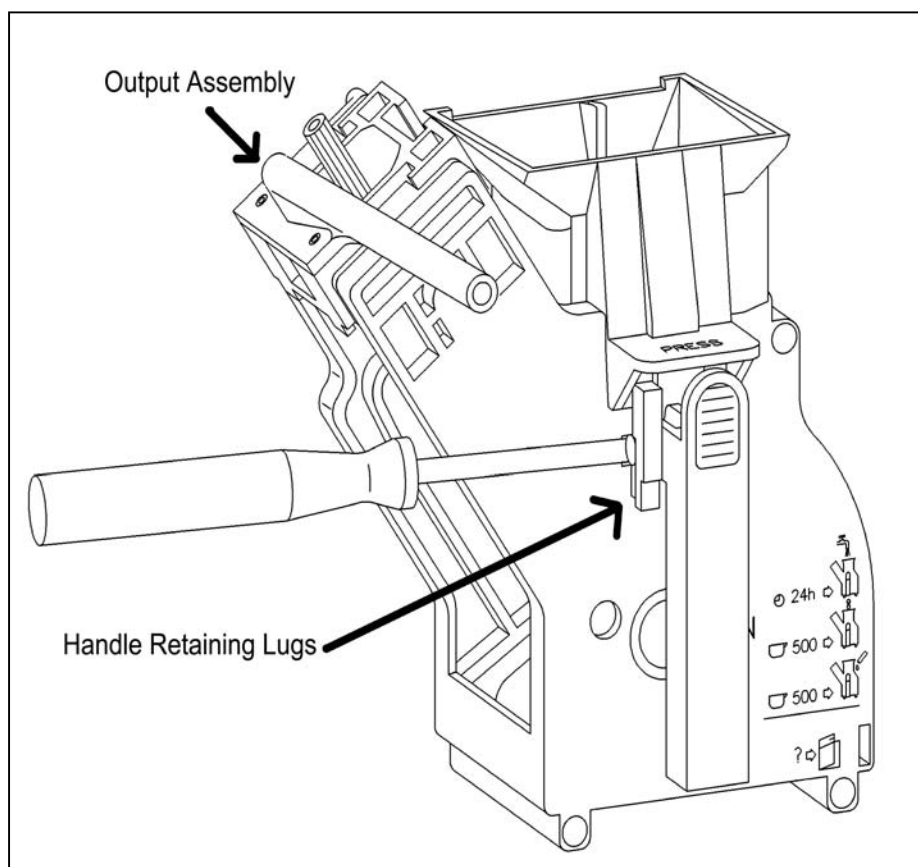


Figure 5-26: Brew Unit; highlighting the output assembly (covering the Creamer Valve) and retaining lugs for securing the handle to the Brew Unit body.

Technical Information**5.30 Brew Unit Funnel - Removal**

1. Remove the Brew Unit from the appliance.
2. Press the Funnel Locking Lug (Figure 27, Item 1), so that the funnel is no longer raised.
3. Lever the funnel upwards out of its holder (Figure 5-28).

Note

When installing the Funnel, ensure the spring (Figure 5-28, Item 1), is seated correctly.

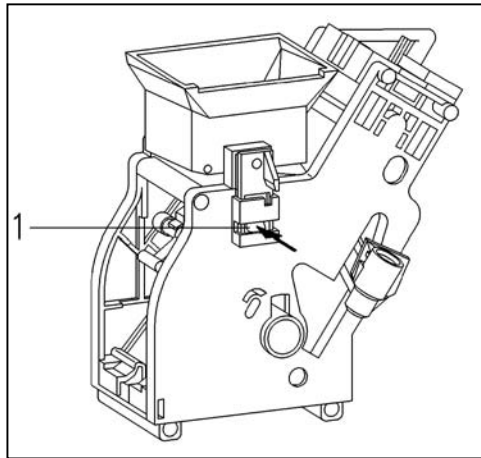


Figure 5-27: Rear of Brew Unit, highlighting the funnel lock

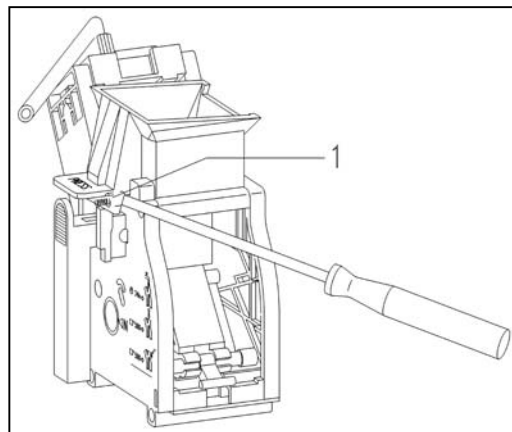


Figure 5-28: Front of Brew Unit, showing spring location and holder

5.31 Brew Unit Ram - Service

1. Remove the Brew Unit from the appliance.
2. Remove the funnel (5.32).
3. Remove the bottom filter screw and filter (Figure 5-29, Items 1 and 2).

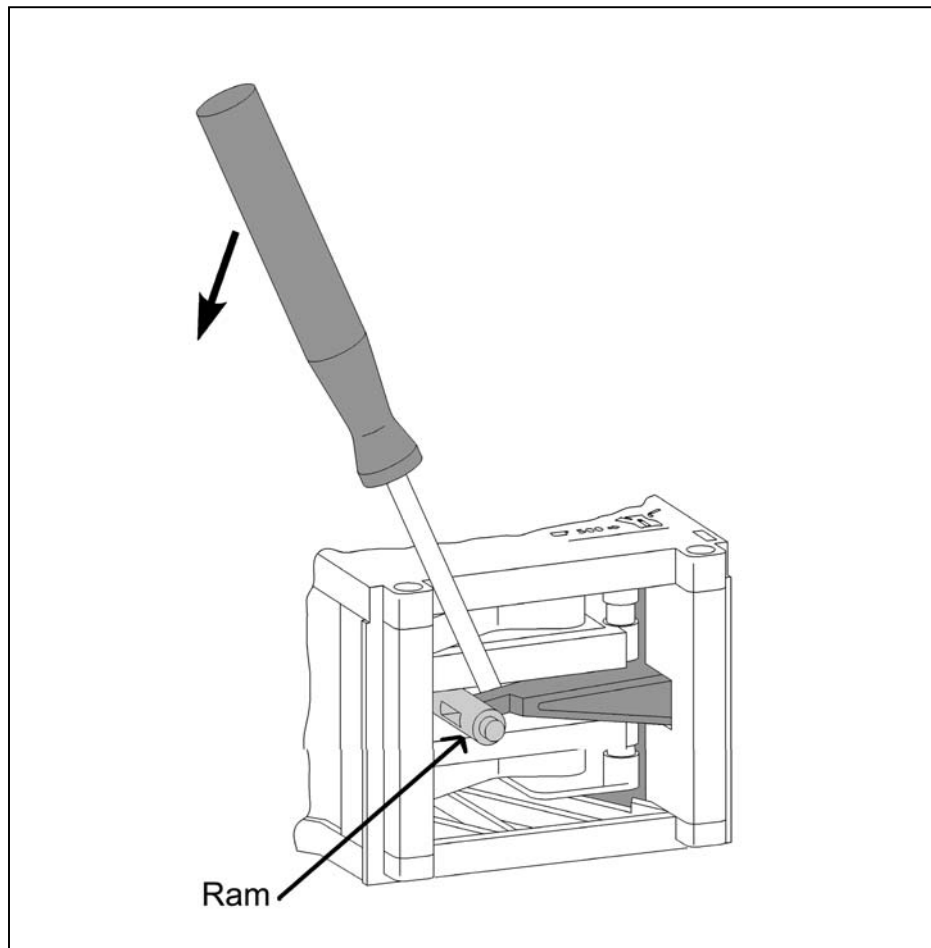


Figure 5-29: Releasing the ram from the bottom of the brew unit.

4. Unclip the lever from the ram.
5. Pull the ram outward to remove from the Brew Unit.

Technical Information

6. Clean the brewing chamber (Figure 5-30), ram and bottom filter by hand with warm water without detergent, then dry.
7. Apply silicone grease to the ram lubrication points.

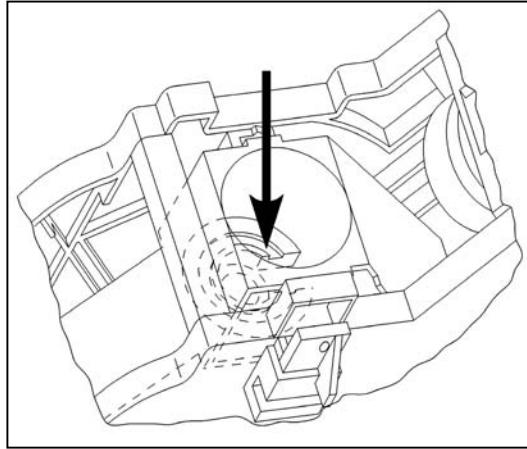


Figure 5-30: Brewing unit chamber inside the brew unit assembly.

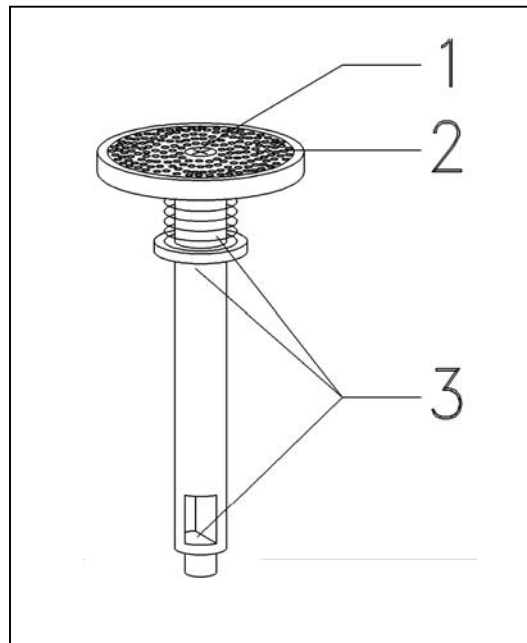


Figure 5-31: Ram assembly. (1) Filter Screw
(2) Filter (3) Lubrication points

5.32 Brew Unit Drives – Service

1. Disconnect the power. Allow the appliance to cool.
2. Remove the Brew Unit from the appliance (5.20 or 5.21)
3. Remove the Waste Container from the appliance.
4. Remove the Beans Container (5.38) and Beans Container Guide (5.39)
5. Remove the Lid (5.1)
6. Remove the Rear Panel (5.3)

Important

Before unplugging any connections, label the plugs and connectors to ensure the wiring is returned to the correct locations during re-assembly.

7. Disconnect L1 and N from the Door Switch to the Interference Suppressor
8. Disconnect the ground wires from the Cord Socket / Terminal Block.
9. Disconnect the following connections from the Power Electronic:
 - JP2
 - JP12
 - JP4
10. Disconnect the following connections from the CPU Electronic:
 - JP34
 - JP35
 - JP25
 - JP39
 - JP41 (Ribbon Cable)
11. Disconnect the ground connection from the Dispenser Solenoid.
12. Disconnect the ground connection from the Hot Water Heater.
13. Remove the CPU Electronic (with its mounting assembly) and position toward the rear outside of the appliance.
14. Remove the Steam Heater from its mount and position it outside the appliance.

Technical Information

15. Disconnect the Water Intake Connection to the Hot Water / Coffee Heater.
16. Refer to Figure 5-32. Remove the two Hot Water / Coffee Heater Screws; Separate the Heater from its mounting position.
17. Refer to Figure 5-32. Remove the two "Cosmetic Fixing" screws. Remove the Cosmetic Fixing from inside the appliance.

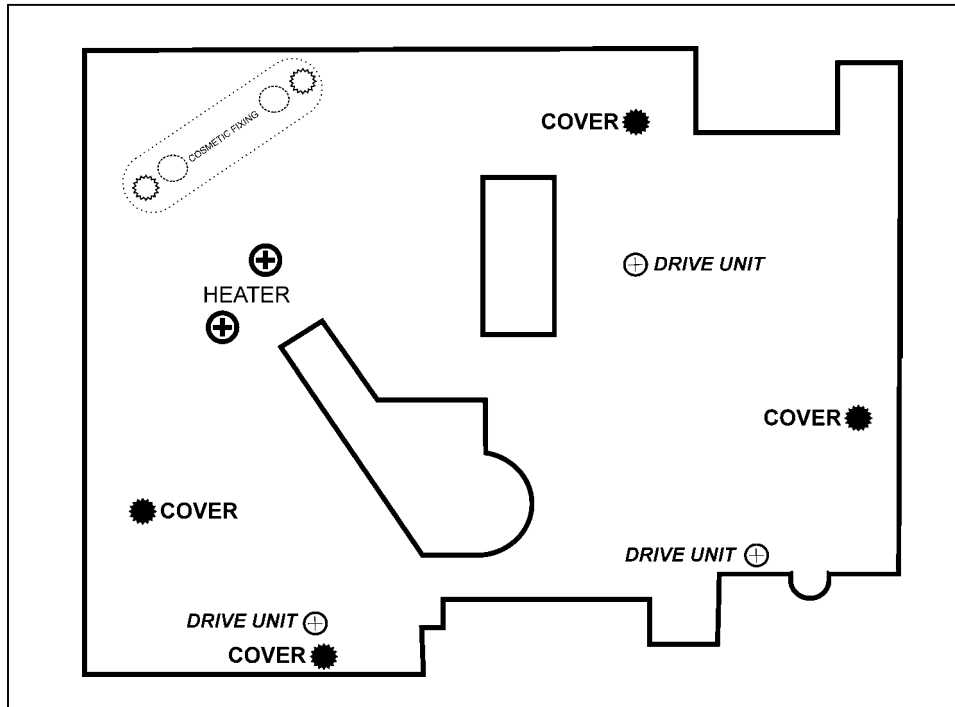


Figure 5-32: Front Plate Assembly with Retaining Screw Locations.

18. Refer to Figures 5-33 and 5-34.
19. Remove the two screws and nuts that secure the Grinder Plate Assembly to the top of the Front Plate Assembly.

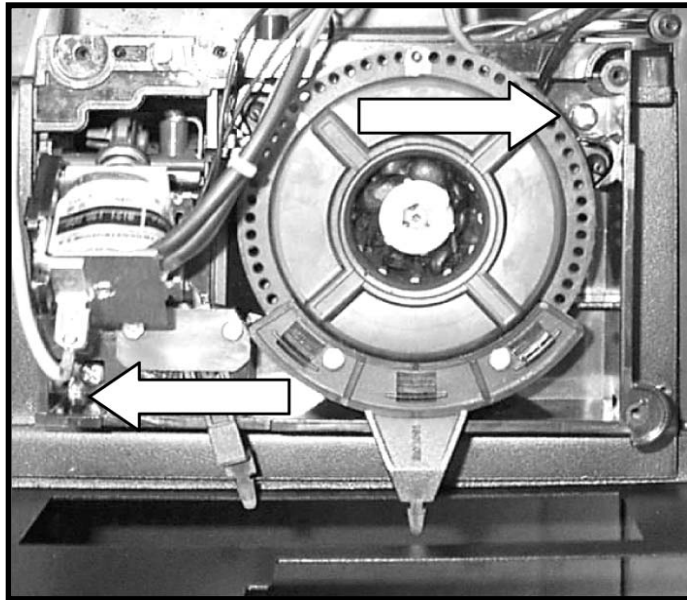


Figure 5-33: Grinder Retaining Screws

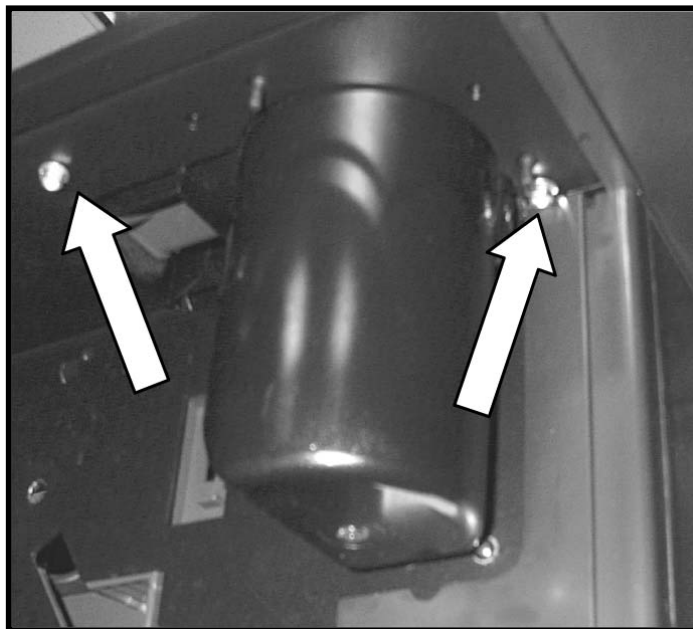


Figure 5-34: Grinder Retaining Nuts

Technical Information

20. Remove the knobs from the Grinder Slide Controls.
21. Remove the Adjustment Slide Switch Frame (5.4).
22. Position the Grinder as necessary to access the Drive Cover and Drive Unit Retaining Screws. Refer to Figure 5-34 for the location of the screws.
23. Remove the two Upper Front Plate Assembly Retaining Screws – as shown in Figure 5-35.
24. Remove all remaining screws from the Front Plate Assembly. Lift upward on the Front Plate Assembly to access the screws near the bottom of the plate. Use Figure 5-32 to locate all screws.

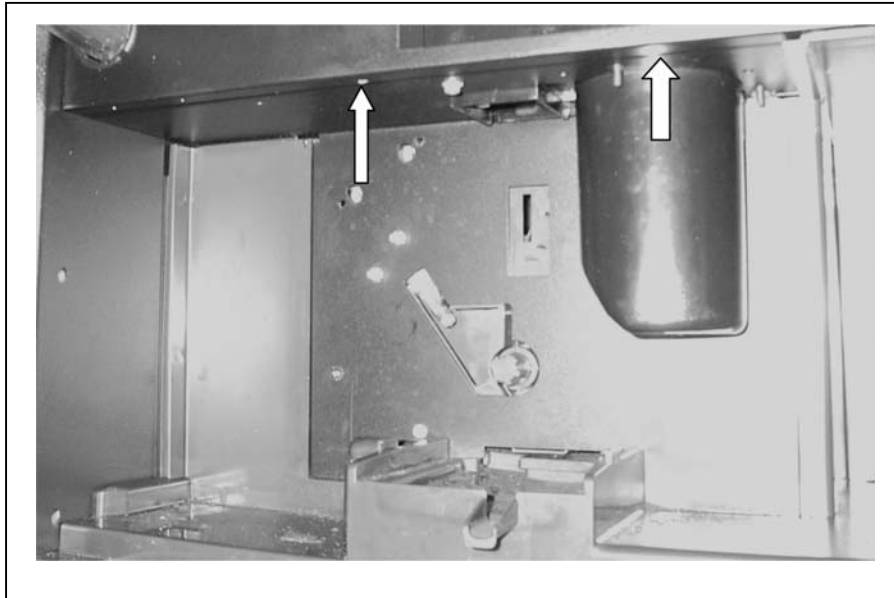


Figure 5-35: Upper Front Plate Assembly Retaining Screws.

25. Move the Drive Assembly Cover toward the rear wall of the appliance.
26. Move the Drive Assembly back while lifting upward to remove it from the appliance. Use caution - a short length of wiring.

Service Tip

Refer to Figure 5-36. To avoid having to hold the Front Plate Assembly upward while removing the lower screws; a suitable item can be used to temporarily keep the Front Plate Assembly in an elevated position.

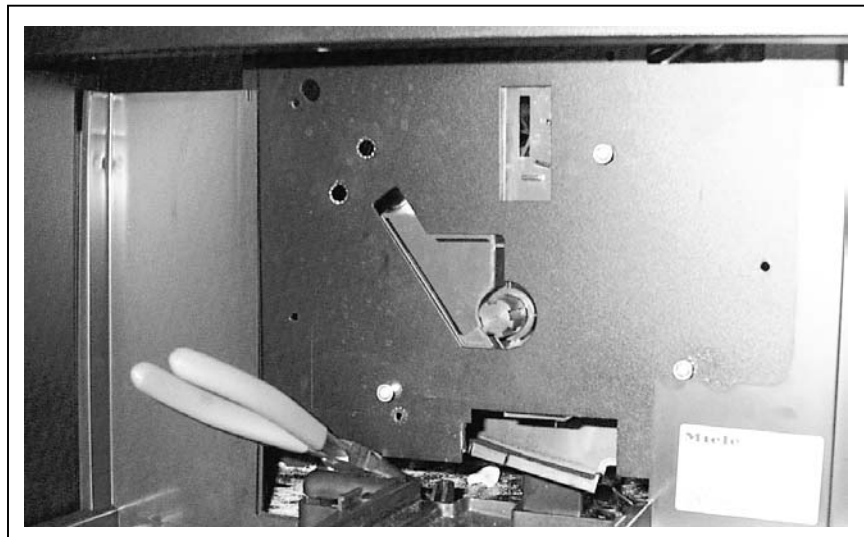


Figure 5-36: Using a suitable item to keep the Front Plate Assembly elevated to access the screws at the bottom

27. Position the Drive Assembly so access to the rear cover is possible.
28. Remove the 5 screws that secure the cover.
29. Lift the cover from the Drive Unit.
30. Refer to 4.15 for information on the Drive Assembly.

Technical Information**5.33 Water Tank Float - Removal**

1. Open the door.
2. Remove the Water Tank.
3. Remove the cap from the Water Tank (Figure 5-37).
4. Remove the Water Tank Float.

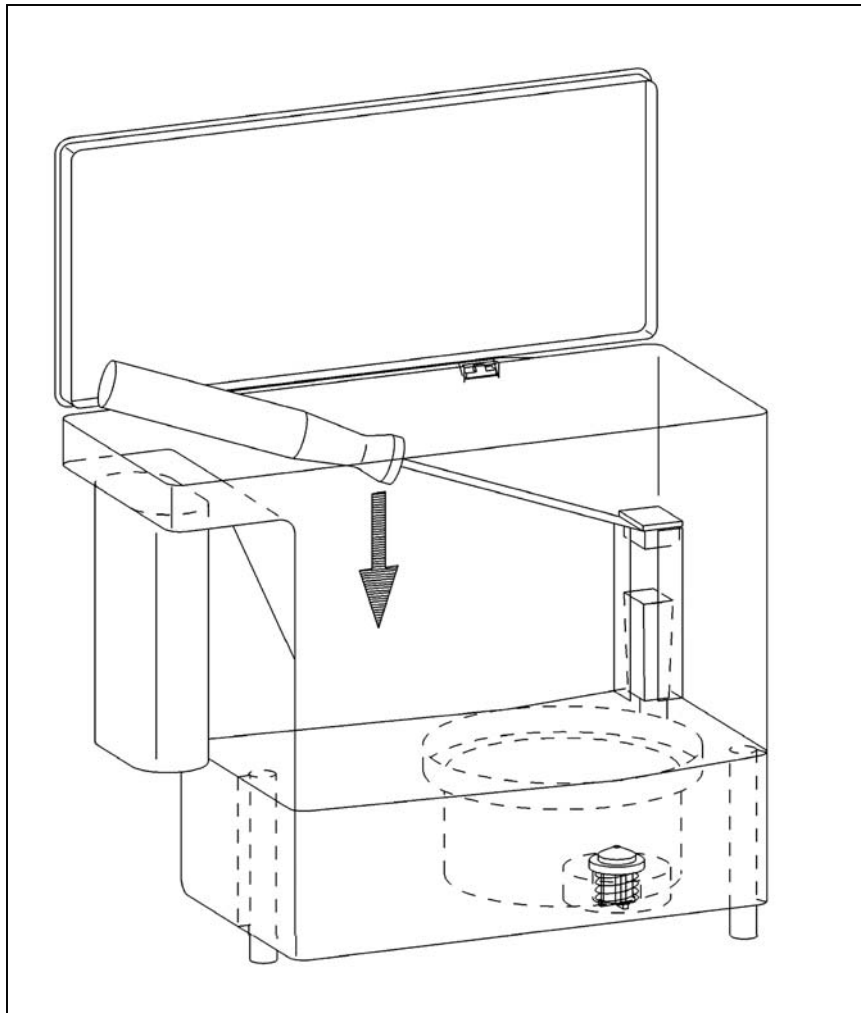


Figure 5-37: Removing the cap to access the float in the water container

5.34 Water Tank Lip Seal - Removal

1. Open the door.
2. Remove the Water Tank.

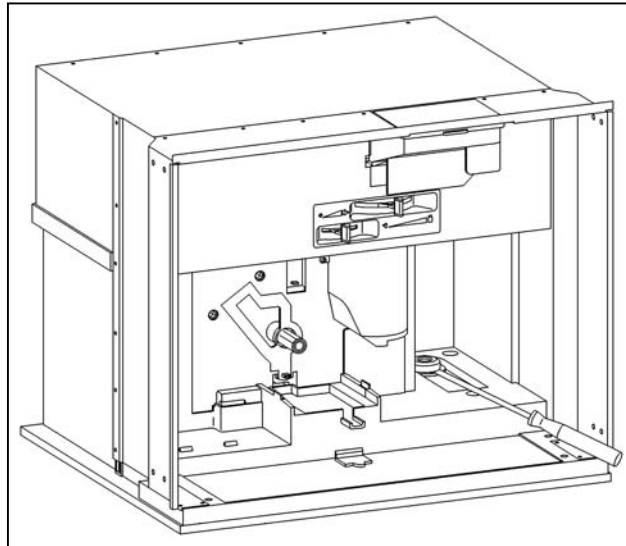


Figure 5-38: Removing the lip seal

3. Lever off the Lip Seal Cap (Figure 5-38).
4. Remove the Lip Seal (Figure 5-39).

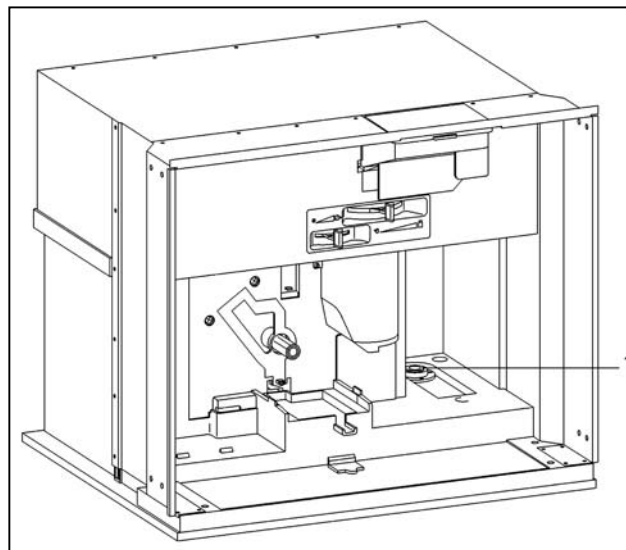


Figure 5-39: Removing the lip seal

Technical Information

5.35 Lower Section of Tank Valve - Removal

1. Open the door.
2. Remove the Water Tank.
3. Remove the Lip Seal (5.38).
4. Remove the lower part of the Valve Fixing Screws (Figure 5-40, Item 1).

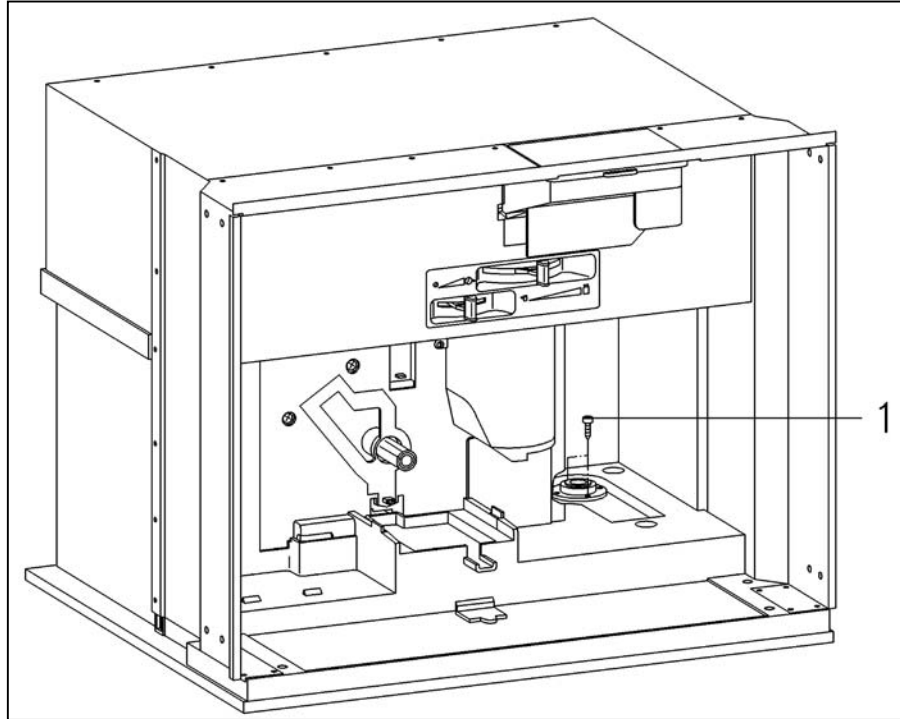


Figure 5-40: Water tank lip seal removal.

5. Remove the Bottom Plate and Drip Tray (5.6 & 5.7)
6. Disconnect the lower part of the valve connections,
7. Remove the lower part of the valve.

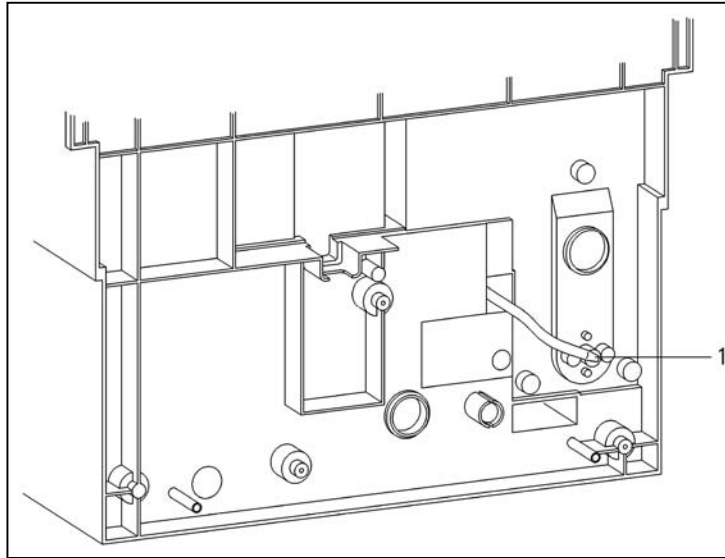


Fig. 5-41: Underside view of the CVA615 with Base Plate and Drip Tray removed.

Technical Information**5.36 Beans Container - Removal**

1. Open the door.
2. Remove the Beans Container End Stop Screw (Figure 5-42).
3. Hold a suitable container under the beans container opening to collect loose beans, remove the beans container.

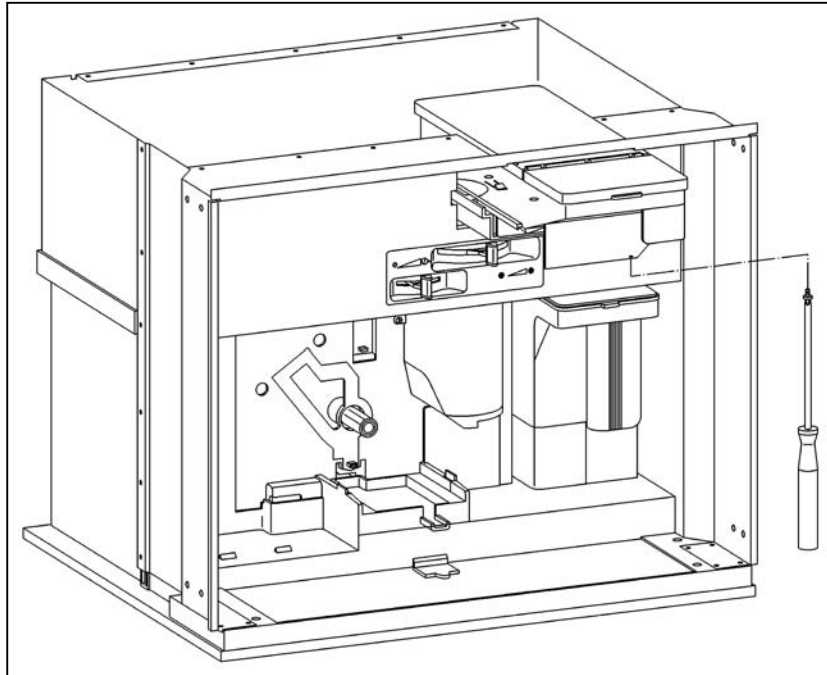


Figure 5-42: Removing the beans container.

5.37 Beans Container Guide - Removal

1. Open the door.
2. Perform the "Beans container removal" procedure (5.39).
3. Remove the Waste Container, Brew Unit and Water Tank.
4. Remove the Top Lid (5.1).
5. Remove the guide retaining screws (Figure 5-43, Item 2).
6. Remove the guide and carrier, (Figure 5-43, Item 1).

Note

During installing, first fit the carrier (Figure 43, Item 1), in position and then fit the guide on the carrier.

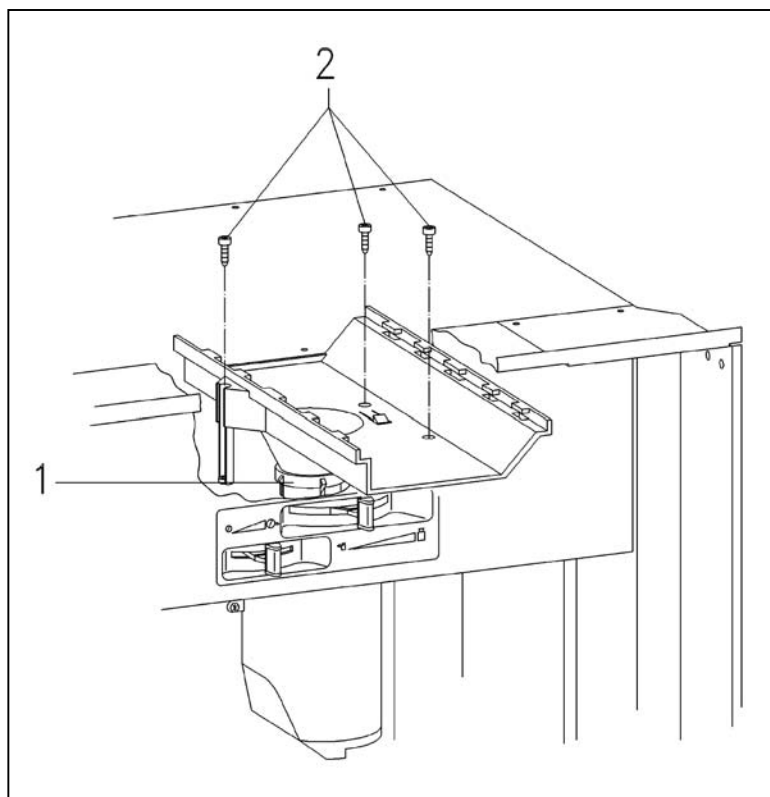


Fig. 5-43: Beans Container Guide (1) carrier (2) retaining screws

5.38 Grinder - Disassembly

Note

The Grinder Ring, and Grinder Cone should only be replaced as a set.

1. Open the door.
2. Remove the Beans Container (5.39).
3. Remove the Waste Container, Brew Unit and Water Tank.
4. Remove the Top Lid (5.1).
5. Remove the Beans Container Guide (5.40).
6. Set the grinding grade adjustment lever to the mid setting.

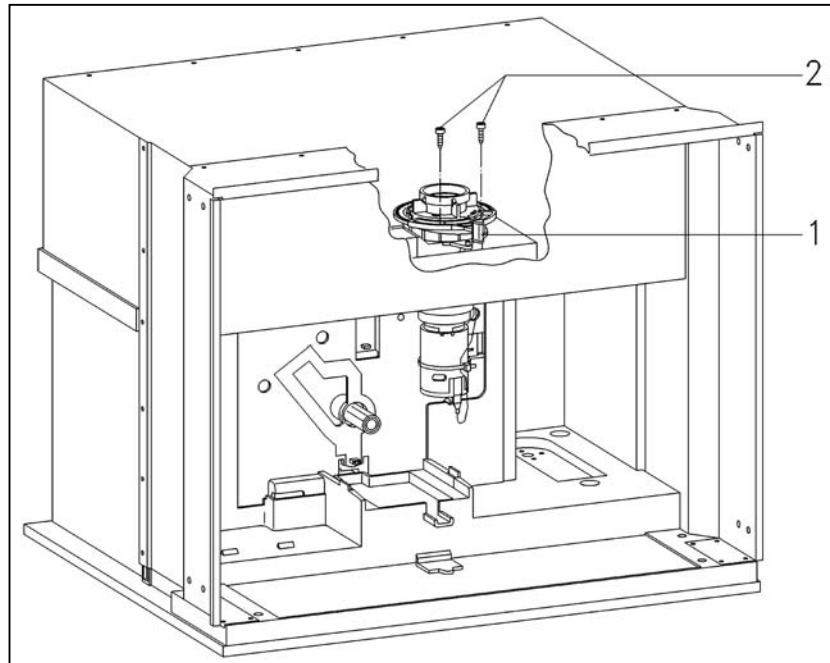


Figure 5-44: (1) Grinder Adjustment Lever (2) Lever Fixing Screws

7. Pull off the handle (Figure 5-44, Item 1).
8. Remove the Adjustment Lever Fixing Screws (Figure 44, Item 2) and the Adjustment Lever.

9. Turn the Adjustment Ring (Figure 5-45, Item 1), counterclockwise until the blue marking aligns with the blue marking on the carrier (Figure 5-45, Item 2).

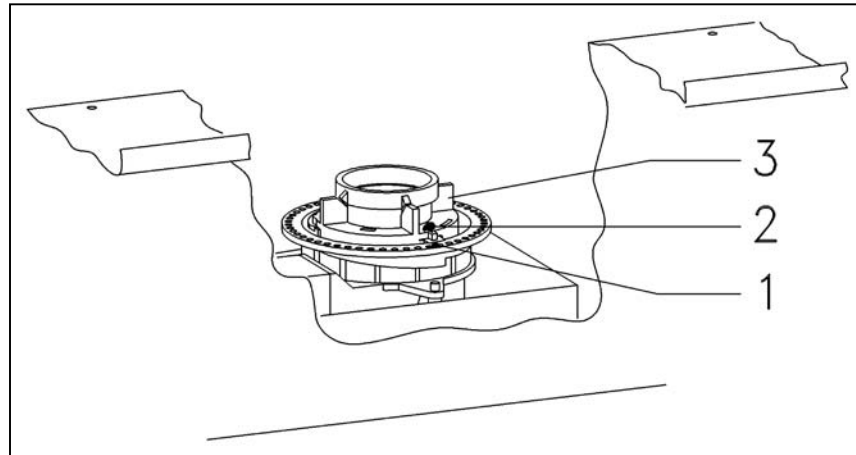


Figure 5-45: Grinder; (1) Adjustment Ring (2) Carrier (3) Bracket.

10. Remove the bracket (Figure 5-45, Item 3)
11. Remove coffee residues, e.g. with a vacuum cleaner.

Note

The Grinding Cone Fixing Screw has a left-hand thread.

12. Remove the grinding cone fixing screw (Figure 5-46, Item 1) by turning it clockwise.
13. Remove the intake worm gear (Figure 5-46, Item 2).
14. Remove the washer (Figure 46, Item 3).

Technical Information

Note

When the Grinding Cone (Figure 46, Item 6), is removed the balls, (Figure 41, Item 8), may stick to it and then fall off.

Refer to figure 5-46 below...

15. Remove the Grinding Cone (Item 6).
16. Remove the balls (Item 8).
17. Remove the mounting (Item 7).
18. Remove the springs (Item 9).
19. Remove the carriers (Item 10).
20. Remove the felt ring (Item 11).

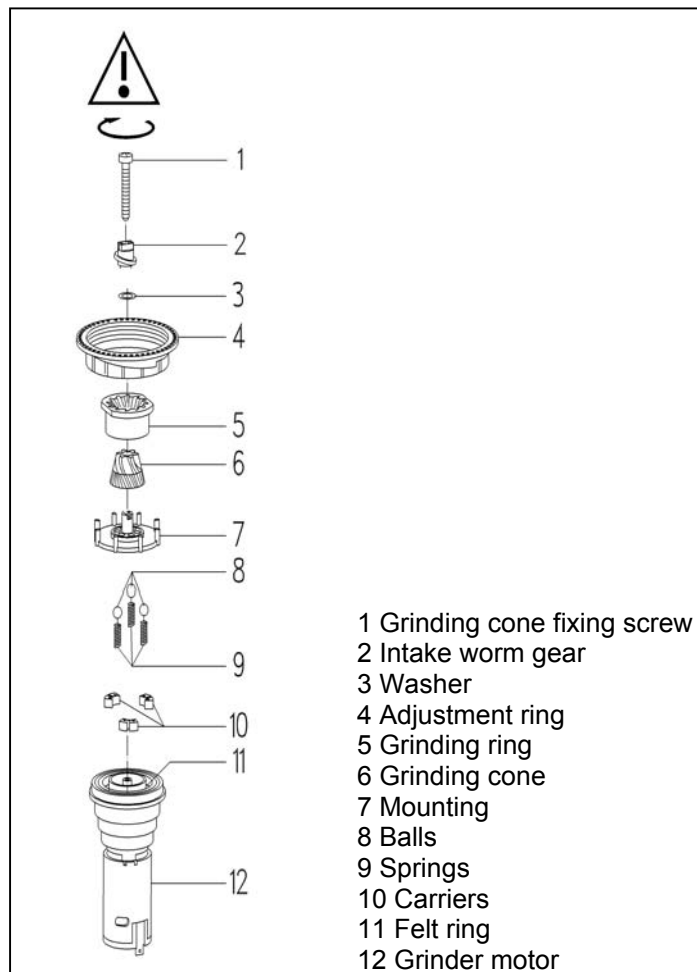


Figure 5-46: Grinder

5.39 Grinder Assembly - Basic Setting

Refer to Figure 5-47.

Note

The Grinder Ring (6), and Grinder Cone, (6), should be replaced together.

1. Install the Felt Ring (11).
2. Install the carriers (10).
3. Install the mounting (7).
4. Install the springs (9).
5. Install the balls (8).
6. Install the Grinding Cone (6), ensure the balls are seated.
7. Install the washer (3).
8. Install the Intake Worm Gear (2), press down, and turn until the coupling engages.
9. Tighten the Grinding Cone Screw (1) counter clockwise.
(Ensure the intake worm gear coupling has engaged properly).

Note

Before setting the grinder, remove all coffee from the grinder.

10. Fit the bracket (3).
11. The blue marking on the carrier (2), has the same position as the blue marking on the adjustment ring (item 1); both point toward the front of the appliance.
12. Turn the Adjustment Ring Clockwise as far as possible.
13. Turn the Adjustment Ring Counterclockwise by 6 settings so that the Adjustment Lever can be secured at a mid setting.
14. Fit the Adjustment Lever such that the grinder is set to a medium grinding grade.
15. Tighten the Adjustment Lever Fixing Screws.
16. Push on the handle.

Technical Information**5.40 Grinder Unit - Removal**

1. Open the door.
2. Remove the Beans Container (5.39).
3. Remove the Waste Container, Brew Unit and Water Tank.
4. Remove the Top Lid (5.1)
5. Remove the Beans Container Guide (5.40).
6. Remove the Adjustment Slide Switch Frame (5.4).
7. Remove the Adjustment Lever Fixing Screws and Lever.
8. Remove the cover fixing screws (Figure 5-47 (4)).
9. Remove the cover.

Note

Mark the polarity of the plug (Figure 48, Item 1), connected to the electronic unit.

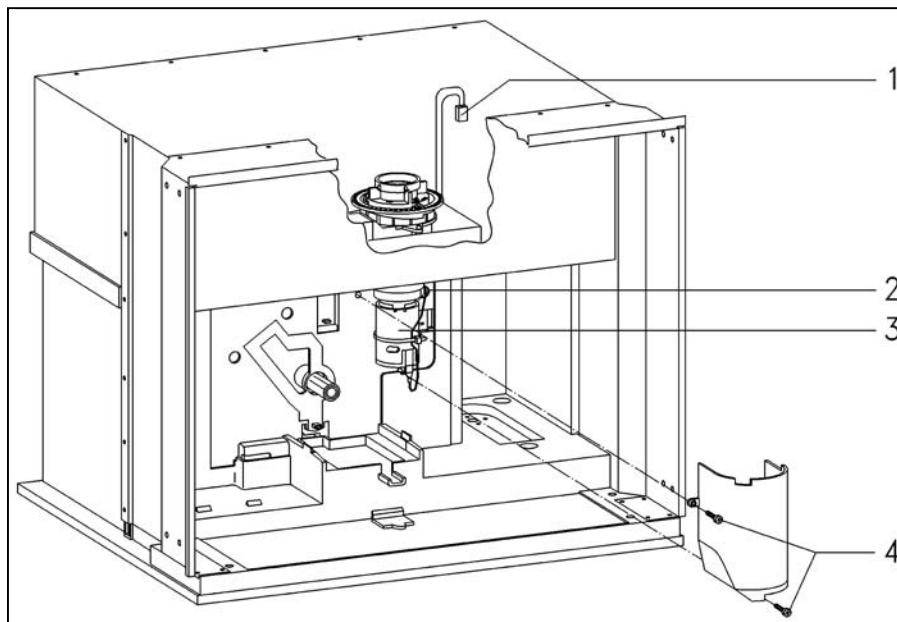


Figure 5-47: Grinder Removal

10. Remove the plug from the electronic unit.
11. Lift the grinder upwards from the dampers (Figure 5-48 (2)).

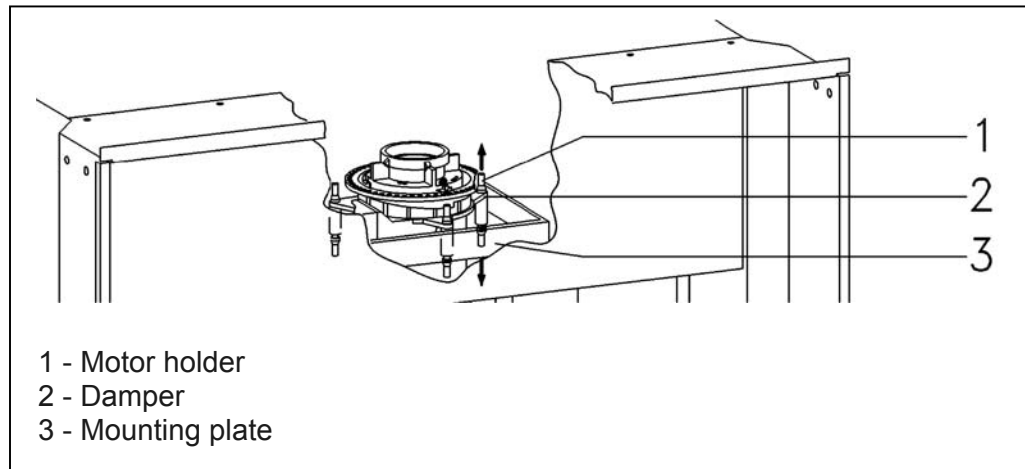


Figure 5-48: Grinder coupling

Note

When installing the grinder, the dampers should be firmly seated in the mounting plate and motor holder. Ensure the grinder coupling is completely secured so grinder noise is kept to a minimum.

Technical Information**5.41 Dispensing Solenoid - Removal**

1. Remove the Top Lid (5.1).
2. Remove the Rear Panel (5.3).
3. Remove the Beans Container (5.39).
4. Remove the Beans Container Guide (5.40).
5. Press the retainers outward.
6. Slide the Dispensing Solenoid upward out of the guide.
7. Disconnect the electrical connections.

5.42 Dispenser Switch - Removal

1. Remove the Top Lid (5.1).
2. Remove the Rear Panel (5.3).
3. Remove the Beans Container (5.39).
4. Remove the Beans Container Guide (5.40).
5. Remove the Dispensing Solenoid (5.43)
6. Press the retainers outwards. Remove the switch.
7. Disconnect the electrical connections.

5.43 Waterpath & Flowmeter - Testing

Caution

Hot water will flow from the water spout during this procedure

1. Fill the water reservoir
2. Place the appliance into the Service Mode with the Selector Knob in the Programming position. (refer to section 6 for further information on service mode access)
3. Press and hold all three coffee buttons; the display shows the following:

5678	34
-------------	-----------

Does a pulsing (flickering) "8" appear in the top line of the display?

NO



YES

Normal Operation – Proceed to step 6.

Does water flow from the Hot Water Spout?

NO

The water is not flowing through the water path – check pump operation and water path for obstructions.

Correct fault & repeat test starting at step 1.

YES

- a. Unplug JP25 from the CPU Electronic
- b. Place a jumper between pins 2 & 3 (figure 5-49).
- c. Place the appliance into the Service Mode with the Selector Knob in the Programming position



Does the display show a solid "8" in the top line of the display?

NO




Replace the electronic

YES




Replace the flowmeter

Technical Information

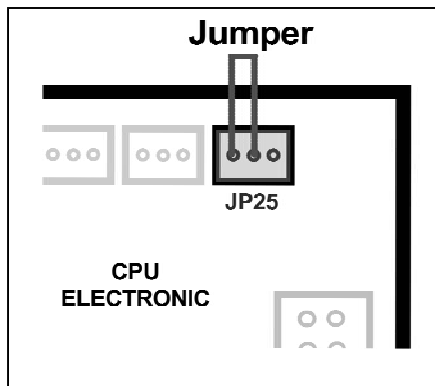**Figure 5-49:** Test Jumper Position

4. Release all three coffee buttons.
5. Remove the jumper and reconnect JP25
6. Press and hold all three coffee buttons. Observe the number displayed in the bottom right of the display (see figure 5-50).

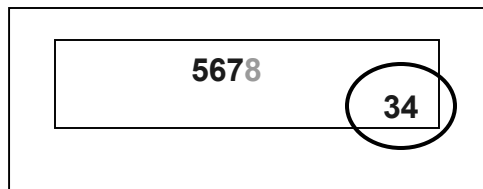**Figure 5-50:** Display while in Service Mode

Is the displayed value 30 or higher?

NO



Ensure...

- Sufficient water is present
- The water path is clear
- Water lines are not crimped
- Heaters, flowmeter etc...freely pass water
- Water valves fully open
- Water line connections are tight & do not leak

YES

Normal Operation

5.44 Water Path Leakage Test

In the event water is present in bottom of the appliance, or a leak is suspected; the following procedure will help in locating the source of the leak.

Caution

Heaters can be hot during this test and hot water may escape from the system

1. Fill the Water reservoir completely
2. Place the appliance into the Service Mode with the Selector Knob in the Programming position. (refer to section 6 for further information on service mode access)
3. Press and hold all three coffee buttons - check for signs of leakage (dripping, squirting etc...)
4. Release the three coffee buttons to end the test

If the steps 1-5 does not disclose any leaks - continue as follows.

5. Fill the Water reservoir completely
6. Place the appliance into the Service Mode
7. Quickly turn the selector knob to the "Operation" position
8. Press and hold all three coffee buttons for 30 seconds
9. Quickly turn the selector knob to the "Programming" position
10. Press and hold all three coffee buttons - check for signs of leakage (dripping, squirting etc...)
11. Release the three coffee buttons to end the test

5.45 Water Path Connections - Opening

Danger!

Risk of burning or scalding!

Components may be hot.

Pressurized steam may exist in the system.

Before any service work is performed, allow time to cool.

Refer to Figure 5-51.

1. Remove the retaining spring (Item 1).
2. Pull out the hose from the connector.
3. Remove the sealing rings (Item 2).

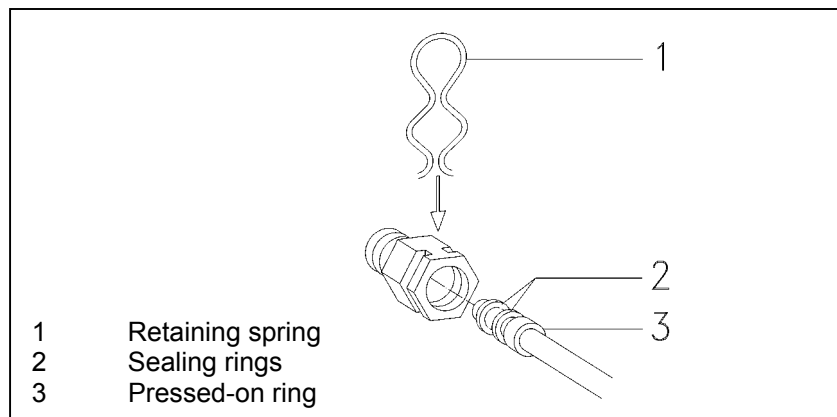


Figure 5-51: Water path connection

5.46 Water Path Connections - Closing

1. Check the sealing rings for damage and replace as necessary.
2. Fit the sealing rings on the hose.
3. Insert the hose in the connector.
4. Fit the retaining spring behind the pressed-on ring.
5. As a check, pull on the hose. It should not be possible to pull the hose out of the connector.

6. Fault Diagnosis

6.1 Programming Mode

The Programming Mode is designed for access by the customer to for changes various setting and change features. To access the Programming Mode, simply turn the selector knob to the “Program Mode” position

The Programming Mode Consist of:

Language	German, Dutch, Portuguese, Spanish, English, Italian or French
Rinsing	on, off
Water hardness	hardness levels 1 to 4
Temperature long coffee	minimum, low, medium, high, maximum
Temperature coffee	minimum, low, medium, high, maximum
Temperature short (espresso) coffee	minimum, low, medium, high, maximum
Pre-brewing	on, off,
Pre-grinding	off, on
Program hot water	off, on
Total coffee	number of coffee servings
Descaling	automatic descaling program
Standby timer	selectable in 15 minute periods

Table 6-1: Programming Mode Navigation

Technical Information

6.2 Service Mode

The Service Mode is used to check the status of various input switches and operate components in the appliance. The Service Mode is designed for accessed by qualified service personnel.

Initial requirements


- Switch off the appliance
- Ensure the front door is closed

Access

1. Press and hold the SMALL COFFEE button and the HOT WATER button.
2. Refer to the Service Mode chart on the following page... turn the selector knob to the desired position.
3. Release the SMALL COFFEE and HOT WATER buttons.
4. Press the applicable button to activate the function listed.

Acknowledgement Indicator

The following is an example indicates the appliance is in the Service Mode...



The display indicates the switches currently actuated.

1. Brewing position switch (brew unit drives)
2. Home position switch (brew unit drives)
3. Dispenser switch
4. Steam valve switch
5. Waste container present switch
6. Brew unit present switch
7. Water tank level switch
8. Flow meter pulse (not always displayed)
- A. Drip tray filled (water system fault)

Service Mode - Navigation

LOCK	Large Coffee	Displays Water Temperature for Water Heater and Steam Heater in Celsius.
	Med Coffee	Displays firmware version
	Small Coffee	(not used)
	Hot Water	(not used)
	Rinse	(not used)
PROGRAM MODE	Large Coffee	Water Pump ON
	Med Coffee	Steam Solenoid ON
	Small Coffee	Hot Water Valve ON
	Hot Water	Displays 5
	Rinse	Displays 4
LIGHT	Large Coffee	Button Test "1" displayed
	Med Coffee	Button Test "2" displayed
	Small Coffee	Button Test "3" displayed
	Hot Water	Button Test "5" displayed
	Rinse	Button Test "4" displayed
ON W/ LIGHT	Large Coffee	Drive motor ON till Brew Position Switch is contacted
	Med Coffee	Drive motor ON (reverse direction) till Home Switch is contacted
	Small Coffee	Grinder ON
	Hot Water	(not used)
	Rinse	Dispenser Solenoid ON
ON	Large Coffee	Hot Water / Coffee Side Heater Element ON
	Med Coffee	Hot Water / Coffee Upper Heater Element ON
	Small Coffee	Steam Heater Element ON
	Hot Water	Front Lights (CVA615)
	Rinse	(not used)

Table 6-2: Service Mode Navigation

Technical Information**6.3 Displayed Messages**

<i>Displayed Message</i>	<i>Information</i>
BREW UNIT BLOCKED	The brew unit is dirty. The brew unit is blocked. The brew unit is Jammed. <ul style="list-style-type: none">• Clean / inspect brew unit / check drives
EXPEL AIR	Air is present with the water system – <ul style="list-style-type: none">• Perform “Expel Air” procedure.
FILL COFFEE BEANS	The bean container is empty OR The grinder may be jammed. <ul style="list-style-type: none">• Add coffee beans to the beans container.• Clean the conical grinder (top of grinder)
BREW UNIT MISSING	Brew unit is not installed OR Not installed correctly. <ul style="list-style-type: none">• Reinstall the brew unit• Check brew unit present switch
DESCALING	<ul style="list-style-type: none">• Perform the Descale Procedure.
WASTE UNIT MISSING	Waste unit is not installed <ul style="list-style-type: none">• Re-install the waste unit• Check magnet on rear of waste unit• Check brew unit present switch

Table 6-3: Displayed Messages (continued on Table 6-4)

<i>Displayed Message</i>	<i>Information</i>
STANDBY...	<p>The appliance is in the energy saving</p> <ul style="list-style-type: none"> • Press ENTER
WATER SYSTEM FAULT	<p>The level switch has been actuated by water being present in the base of the appliance</p> <ul style="list-style-type: none"> • Clear unit of water from lower pan and locate / repair source of leak. • Check level switch for proper operation
FILL WATER TANK	<p>The water tank level switch is not actuated – water tank float is below the switch level</p> <ul style="list-style-type: none"> • Refill the water tank • Check that float and switch operate
EMPTY WATERTANK	<ul style="list-style-type: none"> • Check that flowmeter is plugged into the correct position of the electronic
WARMING UP...	<p>Appliance is warming up, as warming up the “. . .” in the display disappear</p>

Table 6-4: Displayed Messages (continued from Table 6-3)

6.4 Fault Diagnosis

When two cups of coffee/espresso are being prepared at the same time, the cups are filled unevenly.

- Appliance is not level.
 - Level the appliance.
- Coffee nozzle is dirty.
 - Clean the coffee nozzle.

Brew Unit Can't be Removed from the Appliance

- The brew unit is not in the starting (home) position.
 - Reset the brew unit to the starting (home) position.
- The brew unit is jammed and cannot be removed by resetting the appliance (i.e. shutting the door and turning on the power).
 - Perform the manual removal procedure.Inspect the brew unit and/or drives to locate fault.

Brew Unit Cannot be Installed

- The part marked PRESS was pressed during installation of the Brew Unit..
 - Do not press the part marked PRESS when installing the Brew Unit; this only applies during Brew Unit removal.
- The Brew Unit is not in the starting (home position).
 - Perform a manual resetting of the Brew Unit.
- The drive shaft is not in the starting (home) position.
 - Reset the Brew Unit to the starting (home) position via the Service Mode.
 - Carefully inspect the Brew Unit and/or drives to locate fault (i.e. defective switch etc...)

Grinding grade cannot be set finer (adjustment lever appears jammed)

- Ground coffee is between the grinding ring and grinding cone. The ground coffee prevents the gap between the grinding ring and grinding cone from being reduced.
 - Perform the following:
 1. Set the adjustment lever to the finest setting possible.
 2. Prepare a coffee.
- 4. Set the adjustment lever to a finer setting.


Warning

To avoid damage to the grinder, the grinding grade should only be adjusted in small steps.

Technical Information

This page intentionally left blank

6.5 Wiring Diagram

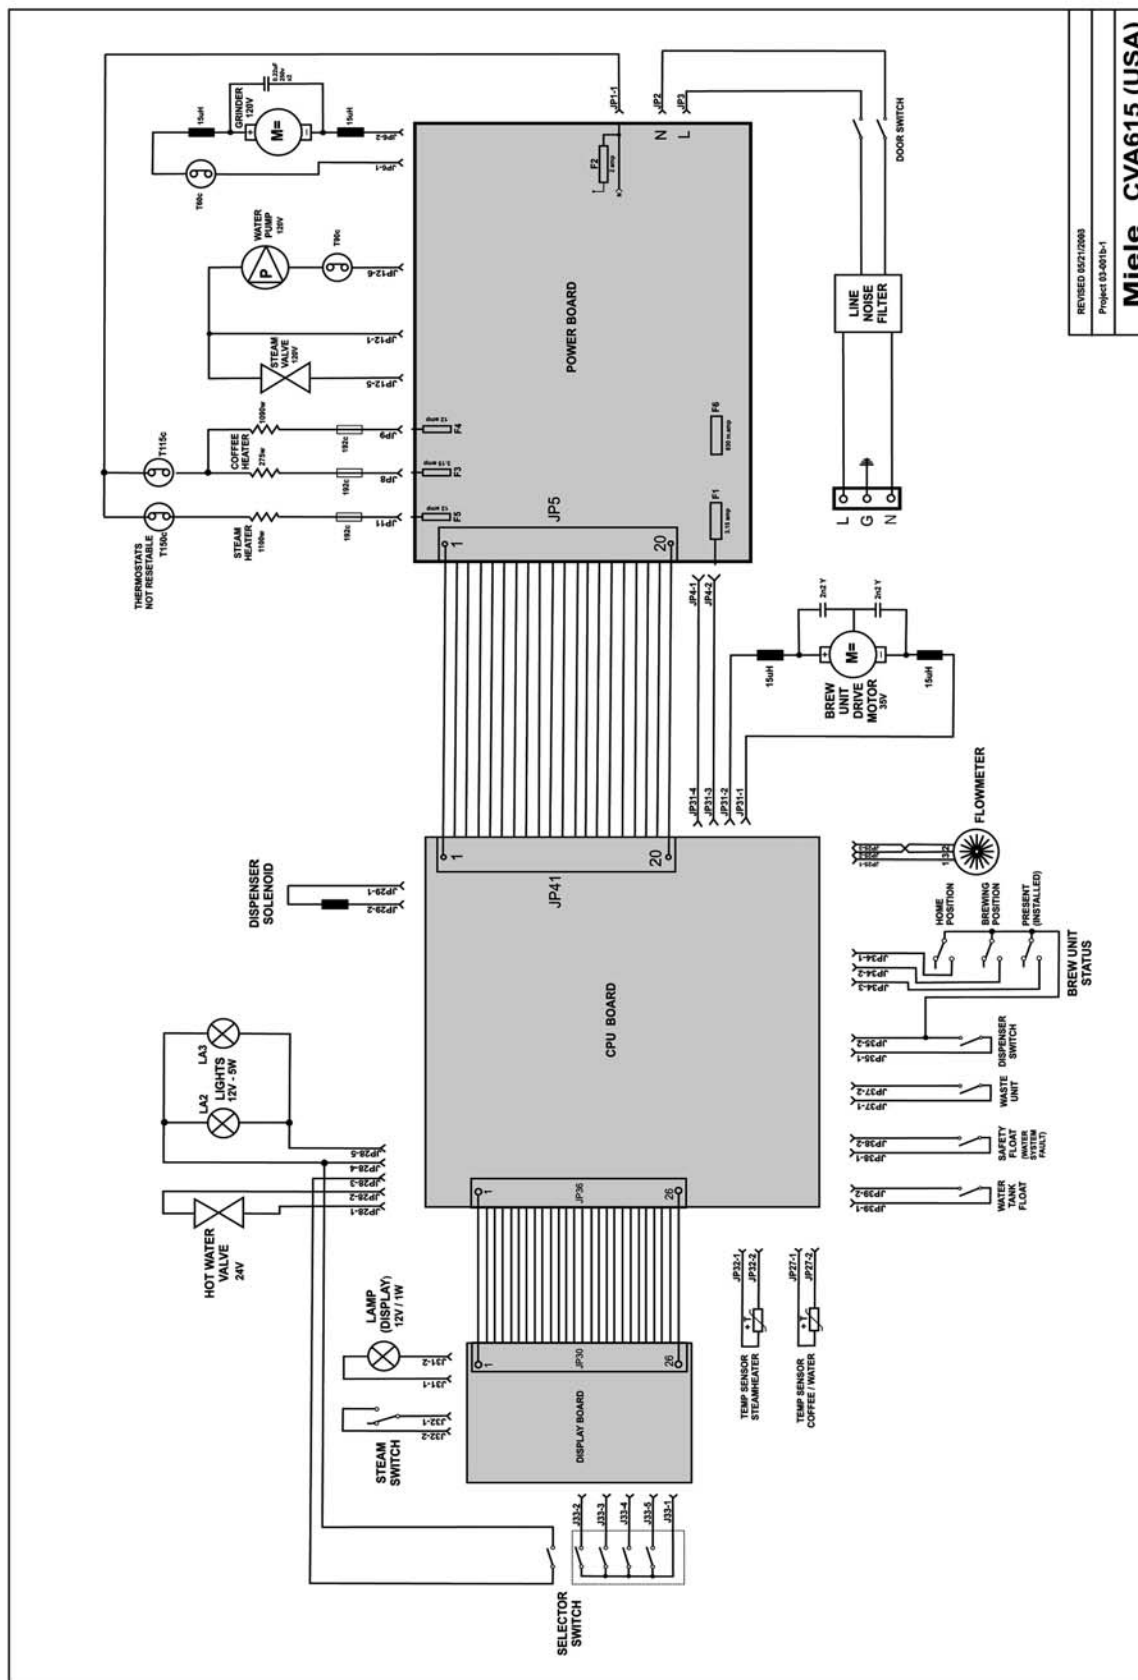

Technical Information

This page intentionally left blank.